

DISLIN 11.5

A Data Plotting Interface

for the

Programming Language

Java

by

Helmut Michels

Contents

1	Overview	1
1.1	Introduction	1
1.2	Dislin Features	1
1.3	Passing Parameters from Java to Dislin Routines	2
1.4	FTP Site, Dislin Home Page	2
1.5	Reporting Bugs	2
A	Short Description of Dislin Routines	3
A.1	Initialization and Introductory Routines	3
A.2	Termination and Parameter Resetting	4
A.3	Plotting Text and Numbers	5
A.4	Colours	5
A.5	Fonts	6
A.6	Symbols	6
A.7	Axis Systems	7
A.8	Secondary Axes	8
A.9	Modification of Axes	8
A.10	Axis System Titles	9
A.11	Plotting Data Points	9
A.12	Legends	10
A.13	Line Styles and Shading Patterns	11
A.14	Cycles	12
A.15	Base Transformations	12
A.16	Shielding	12
A.17	Parameter Requesting Routines	12
A.18	Elementary Plot Routines	14
A.19	Conversion of Coordinates	15
A.20	Utility Routines	15
A.21	Binary File I/O	16
A.22	Date Routines	16
A.23	Cursor Routines	17
A.24	Transparency	17
A.25	Bar Graphs	17
A.26	Pie Charts	18
A.27	Coloured 3-D Graphics	19
A.28	3-D Graphics	20
A.29	Geographical Projections	22
A.30	Contouring	23
A.31	Image Routines	24
A.32	Window Routines	25
A.33	Widget Routines	25
A.34	Dislin Quickplots	28

A.35 Using Threads	28
A.36 Reading FITS Files	28
A.37 MPS Logo	28
B Examples	29
B.1 Demonstration of CURVE	30
B.2 Symbols	32
B.3 Logarithmic Scaling	34
B.4 Interpolation Methods	36
B.5 Line Styles	38
B.6 Legends	40
B.7 Shading Patterns (AREAF)	42
B.8 Vectors	44
B.9 3-D Colour Plot	46
B.10 Surface Plot	48
B.11 Surface Plot	50
B.12 Polar Plots	52
B.13 Contour Plot	54
B.14 Shaded Contour Plot	57
B.15 Pie Charts	60
B.16 World Coastlines and Lakes	62

Chapter 1

Overview

1.1 Introduction

This manual describes a data plotting extension for the object-oriented programming language Java. The plotting extension is based on the data plotting library Dislin that is available for several C, Fortran 77 and Fortran 90/95 compilers.

Dislin is a high-level plotting library that contains subroutines and functions for displaying data graphically as curves, bar graphs, pie charts, 3-D colour plots, surfaces, contours and maps. The library contains about 700 plotting and parameter setting routines which are now available from Java applications.

1.2 Dislin Features

The following features are supported by Dislin:

- Several output formats can be selected such as X11, PostScript, PDF, CGM, WMF, PNG, BMP, PPM, GIF, TIFF and HPGL.
- 9 software fonts are available where each font provides 6 alphabets and special european characters. Hardware fonts for PostScript printers and X11 and Windows displays can also be used.
- Plotting of two- and three-dimensional axis systems. Axes can be linearly or logarithmically scaled and labeled with linear, logarithmic, date, time, map and user-defined formats.
- Plotting of curves. Several curves can appear in one axis system and can be differentiated by colour, line style and pattern. Multiple axis systems can be displayed on one page.
- Plotting of legends.
- Elementary plot routines for lines, vectors and outlined or filled regions such as rectangles, circles, arcs, ellipses and polygons.
- Shielded regions can be defined.
- Business graphics.
- 3-D colour graphics.
- 3-D graphics.
- Elementary image routines.

- Geographical projections and plotting of maps.
- Contouring.

1.3 Passing Parameters from Java to Dislin Routines

Normally, parameters must be passed from Java to Dislin as strings, float and int scalars and float and int arrays. The following rules are applied:

- Parameters can be passed from Java to Dislin routines as variables, constants and expressions.
- String constants must be enclosed in a pair quotation marks.
- Floating point parameters must be passed as float variables, constants and expressions. Floating point constants are specified with an appending f or F.
- Integer parameters must be of type int.
- Two-dimensional arrays must be passed as one-dimensional arrays from Java to Dislin. For example, if you have the two-dimensional array XMAT[N][M] in Java, you have to pass the one-dimensional array XRAY[N*M] to Dislin where XRAY[i*M+j] corresponds to XMAT[i][j].
- The number and meaning of parameters passed to Dislin routines are identical with the syntax description of the routines in the Dislin manual except for routines that change parameters. These routines are implemented in Java as functions with a return value. For example, the function getpag (&nw, &nh) returns in Dislin the page width. In Java, this routine is implemented as nw = getpag (1) and nh = getpag (2).

1.4 FTP Site, Dislin Home Page

The Dislin software is available via ftp anonymous from the site:

<ftp://ftp.gwdg.de/pub/grafik/dislin>

The Dislin home page is:

<https://www.dislin.de>

1.5 Reporting Bugs

Dislin is well tested by many users and should be very bug free. However, no software is perfect. If you have any problems with Dislin, contact the author:

Helmut Michels
Dislin Software
Am Hachweg 10
37083 Göttingen, Germany
Email: michels@dislin.de

Appendix A

Short Description of Dislin Routines

This appendix presents a short description of all Dislin routines that can be called from Java applications. A complete description of the routines can be found in the Dislin manual or via the online help of Dislin. For parameters, the following conventions are used:

- integer variables begin with the character N or I;
- strings begin with the character C;
- other variables are floating point numbers;
- one-dimensional arrays end with the keyword 'ray', two-dimensional arrays with the keyword 'mat' where two-dimensional arrays must also be passed as one-dimensional arrays from Java to Dislin.

A.1 Initialization and Introductory Routines

Routine	Meaning
bmpmod (n, cval, copt)	defines the physical resolution of BMP files.
bufmod (cmode, ckey)	modifies the behaviour of the output buffer.
cgmbgd (xr, xg, xb)	defines the background colour for CGM files.
cgmpic (cstr)	sets the picture ID for CGM files.
disenv (cenv)	defines the Dislin environment.
disini ()	initializes Dislin.
erase ()	clears the screen.
errdev (cdev)	defines the error device.
errfil (cfil)	sets the name of the error file.
errmod (ckey, copt)	modifies the printing of error messages.
filbox (nx, ny, nw, nh)	defines the position and size of included metafiles.
filopt (copt, ckey)	modifies rules for creating file versions.
filmod (cmode)	defines the file creation mode.
nw, nh, iret = filsiz (cfil, idx)	returns the size on an image file.
iret = filtyp (ctype)	returns the type of a file.
filwin (nx, ny, nw, nh)	defines a rectangle of the image that will be included by INCFIL.
gifmod (cmode, ckey)	enables transparency for GIF files.
hpgmod (cmode, ckey)	defines options for HPGL files.
hworig (nx, ny)	defines the origin of the PostScript hardware page.
hwpage (nw, nw)	defines the size of the PostScript hardware page.
hwscal (xscl)	modifies the scale operator in PostScript files.
imgfmt (copt)	defines the format of image files.

Routine	Meaning
incfil (cfil)	includes metafiles into a graphics.
metafl (cfmt)	defines the plotfile format.
newpag ()	creates a new page.
origin (nx, ny)	defines the origin.
page (nw, nh)	sets the page size.
pagera ()	plots a page border.
pagfl (iclr)	fills the page with a colour.
paghdr (c1, c2, iopt, idir)	plots a page header.
pagmod (copt)	selects a page rotation.
pagorg (copt)	defines the origin of the page.
n = pdfbuf (cbuf, nmax)	copies a PDF file to a buffer.
pdfmod (cmode, ckey)	defines PDF options.
pdfmrk (cstr, copt)	defines kookmarks for PDF files.
pngmod (cmode, ckey)	enables transparency for PNG files.
selfac (x)	defines a scaling factor for the entire plot.
sclmod (copt)	defines a scaling mode.
scrmod (copt)	swaps back- and foreground colours.
sendbf ()	flushes the output buffer.
setfil (cfil)	sets the plotfile name.
setpag (copt)	selects a predefined page format.
setxid (id, copt)	defines an external X Window or pixmap.
symfil (cdev, cstat)	sends a plotfile to a device.
tifmod (n, cval, copt)	defines the physical resolution of TIFF files.
unit (nu)	defines the logical unit for messages.
units (copt)	defines the plot units.
wfmod (cmode, ckey)	modifies the format of WMF files.

Figure A.1: Initialization and Introductory Routines

A.2 Termination and Parameter Resetting

Routine	Meaning
delglb ()	frees space allocated for global parameters.
disfin ()	terminates Dislin.
endgrf ()	terminates an axis system and sets the level to 1.
reset (copt)	resets parameters to default values.

Figure A.2: Termination and Parameter Resetting

A.3 Plotting Text and Numbers

Routine	Meaning
angle (n)	defines the character angle.
chaang (x)	defines an inclination angle for characters.
chaspc (x)	affects character spacing.
chawth (x)	affects the width of characters.
fixspc (x)	sets a constant character width.
frmess (nfrm)	defines the thickness of text frames.
height (n)	defines the character height.
messag (cstr, nx, ny)	plots text.
mixalf ()	enables control signs in character strings for plotting indices and exponents.
newmix ()	defines an alternate set of control characters for plotting indices and exponents.
n = nlmess (cstr)	returns the length of strings in plot coordinates.
number (x, ndig, nx, ny)	plots floating point numbers.
numfmt (copt)	determines the format of numbers.
numode (c1, c2, c3, c4)	modifies the appearance of numbers.
rlmess (cstr, x, y)	plots text.
rlnumb (x, ndig, xp, yp)	plots numbers.
setbas (xfac)	determines the position of indices and exponents.
setexp (xfac)	sets the height of indices and exponents.
setmix (char, cmix)	defines control signs for indices and exponents.
texmod (cmode)	enables TeX mode for plotting mathematical formulas.
texopt (copt, ctype)	defines TeX options.
texval (x, copt)	defines TeX values.
txtbgd (nclr)	defines a background colour for text and numbers.
txtjus (copt)	defines the alignment of text and numbers.

Figure A.3: Plotting Text and Numbers

A.4 Colours

Routine	Meaning
color (color)	defines colours.
hsvrgb (xh, xs, xv, rgbray)	converts HSV to RGB coordinates.
n = indrgb (xr, xg, xb)	calculates a colour index.
n = intrgb (xr, xg, xb)	calculates an explicit colour value.
myvlt (rray, gray, bray, n)	changes the current colour table.
rgbhsv (xr, xg, xb, hsvray)	converts RGB to HSV coordinates.
setclr (nclr)	defines colours.
setind (i, xr, xg, xb)	changes the current colour table.

Routine	Meaning
setrgb (xr, xg, xb)	defines colours.
setvlt (cvlt)	selects a colour table.
setrgb (xr, xg, xb)	defines colours.
vtfil (cfil, cmod)	stores or loads a colour table.

Figure A.4: Colours

A.5 Fonts

Routine	Meaning
basalf (calph)	defines the base alphabet.
basalf (calph)	defines the base alphabet.
chacod (copt)	defines the character coding.
complx ()	sets a complex font.
duplx ()	sets a double-stroke font.
disalf ()	sets the default font.
ushft (cnat, char)	defines a shift character for European characters.
gothic ()	sets a gothic font.
helve ()	sets a shaded font.
helves ()	sets a shaded font with small characters.
helvet ()	sets a shaded font with thick characters.
hwfont ()	sets a standard hardware font.
psfont (cfont)	sets a PostScript font.
psmode (cmode)	enables Greek and Italic characters in PostScript fonts.
serif ()	sets a complex shaded font.
simplx ()	sets a single-stroke font.
smxalf (calph, c1, c2, n)	defines shift characters for alternate alphabets.
triplx ()	sets a triple-stroke font.
ttfont (cfont)	loads a TrueType font.
winfnt (cfont)	sets a TrueType font for Windows displays.
x11fnt (cfont, copt)	sets an X11 font for X11 displays.

Figure A.5: Fonts

A.6 Symbols

Routine	Meaning
hsymb (n)	defines the height of symbols.
mysymb (xray, yray, n, isym, iflag)	defines an user-defined symbol.
rlsymb (nsym, x, y)	plots symbols for user coordinates.
symbol (nsym, nx, ny)	plots symbols.
symrot (xang)	defines a rotation angle for symbols.

Figure A.6: Symbols

A.7 Axis Systems

Routine	Meaning
addlab (cstr, v, itic, cax)	plots additional single labels.
ax2grf ()	suppresses the plotting of the upper X- and left Y-axis.
ax3len (nx1, ny1, nz1)	defines axis lengths for a coloured 3-D axis system.
axsbgd (iclr)	defines the background colour.
axsers ()	erases the contents of an axis system.
axslen (nx1, ny1)	defines axis lengths for a 2-D axis system.
axsorg (nx, ny)	determines the position of a crossed axis system.
axspos (nxp, nyp)	determines the position of axis systems.
axstyp (ctype)	select rectangular or crossed axis systems.
axgit ()	plots the lines $X = 0$ and $Y = 0$.
box2d ()	plots a border around an axis system.
center ()	centres axis systems.
cross ()	plots the lines $X = 0$ and $Y = 0$ and marks them with ticks.
endgrf ()	terminates an axis system.
frame (nfrm)	defines the frame thickness of axis systems.
frmclr (nclr)	defines the colour of frames.
ndig = gaxpar (v1, v2, copt, cax, xray)	calculates axis parameters.
grace (ngrace)	affects the clipping margin of axis systems.
graf (xa, xe, xor, xstp,	plots a two-dimensional axis system.
ya, ye, yor, ystp)	
graf3 (xa, xe, xor, xstp, ya, ye,	plots an axis system for colour graphics.
yor, ystp, za, ze, zor, zstp)	
grafp (xe, xor, xstp, yor, ystp)	plots a polar axis system.
grafr (xray, n, yray, m)	plots an axis system for a Smith chart.
grdpol (nx, ny)	plots a polar grid.
grid (nx, ny)	overlays a grid on an axis system.
gridim (zim, zre1, zre2, n)	plots a grid line with a constant imaginary part in a Smith chart.
gridre (zre, zim1, zim2, n)	plots a grid line with a constant real part in a Smith chart.
noclip ()	suppresses clipping of user coordinates.
nograf ()	suppresses the plotting of an axis system.
polmod (cpos, cdir)	modifies the appearance of polar labels.
setgrf (c1, c2, c3, c4)	suppresses parts of an axis system.
setscl (xray, n, cax)	sets automatic scaling.
title ()	plots a title over an axis system.
xaxgit ()	plots the line $Y = 0$.
xcross ()	plots the line $Y = 0$ and marks it with ticks.
yaxgit ()	plots the line $X = 0$.
ycross ()	plots the line $X = 0$ and marks it with ticks.

Figure A.7: Axis Systems

A.8 Secondary Axes

Routine	Meaning
xaxis (xa, xe, xor, xstp, nl, cstr, it, nx, ny)	plots a linear X-axis.
xaxlg (xa, xe, xor, xstp, nl, cstr, it, nx, ny)	plots a logarithmic X-axis.
yaxis (ya, ye, yor, ystp, nl, cstr, it, nx, ny)	plots a linear Y-axis.
yaxlg (ya, ye, yor, ystp, nl, cstr, it, nx, ny)	plots a logarithmic Y-axis.
ypolar (ya, yb, yor, ystp, cstr, ndist)	plots a polar Y-axis.
zaxis (za, ze, zor, zstp, nl, cstr, it, id, nx, ny)	plots a linearly scaled colour bar.
zaxlg (za, ze, zor, zstp, nl, cstr, it, id, nx, ny)	plots a logarithmically scaled colour bar.

Figure A.8: Secondary Axes

A.9 Modification of Axes

Routine	Meaning
axclrs (nclr, copt, cax)	defines colours for axis elements.
axends (copt, cax)	suppresses certain labels.
axsscl (copt, cax)	defines the axis scaling.
hname (nh)	defines the character height of axis names.
intax ()	defines integer numbering for all axes.
labdig (ndig, cax)	sets the number of decimal places for labels.
labdis (ndis, cax)	sets the distance between labels and ticks.
labels (copt, cax)	selects labels.
labjus (copt, cax)	defines the alignment of axis labels.
labmod (ckey, cval, cax)	modifies date labels.
labpos (copt, cax)	determines the position of labels.
labtyp (copt, cax)	defines vertical or horizontal labels.
logtic (copt)	modifies the appearance of logarithmic ticks.
mylab (cstr, itic, cax)	sets user-defined labels.
namdis (ndis, cax)	sets the distance between axis names and labels.
name (cstr, cax)	defines axis titles.
namjus (copt, cax)	defines the alignment of axis titles.
noline (cax)	suppresses the plotting of axis lines.
rgtlab ()	right-justifies labels.
rvynam ()	defines an angle for Y-axis names.
ticks (ntics, cax)	sets the number of ticks.
ticlen (nmaj, nmin)	sets the length of ticks.

Routine	Meaning
ticmod (copt, cax)	modifies the plotting of ticks at calendar axes.
ticpos (copt, cax)	determines the position of ticks.
timopt ()	modifies time labels.

Figure A.9: Modification of Axes

A.10 Axis System Titles

Routine	Meaning
htitle (nh)	defines the character height of titles.
lfttit ()	left-justifies title lines.
linesp (xfac)	defines line spacing.
titjus (copt)	defines the alignment of titles.
title ()	plots axis system titles.
titlin (cstr, ilin)	defines text lines for titles.
titpos (copt)	defines the position of titles.
vkyltit (nshift)	shifts titles in the vertical direction.

Figure A.10: System Titles

A.11 Plotting Data Points

Routine	Meaning
bars (xray, y1ray, y2ray, n)	plots a bar graph.
bars3d (xray, yray, z1ray, z2ray, n)	plots 3-D bars.
chnatt ()	changes curve attributes.
chnrcv (copt)	defines attributes changed automatically by CURVE.
color (color)	defines the colour used for text and lines.
crvmat (zmat, n, m, ixpts, iypts)	plots a coloured surface.
curve (xray, yray, n)	plots curves.
curve3 (xray, yray, zray, n)	plots coloured rectangles.
curvx3 (xray, y, zray, n)	plots rows of coloured rectangles.
curvy3 (x, yray, zray, n)	plots columns of coloured rectangles.
errbar (xray, yray, e1ray, e2ray, n)	plots error bars.
fbars (x1ray, x2ray, x3ray, x4ray, x5ray, n)	plots financial bars.
field (x1ray, y1ray, x2ray, y2ray, n, ivec)	plots a vector field.
gapcrv (xgap)	defines gaps plotted by CURVE.
incrcv (ncrv)	defines the number of curves plotted with equal attributes.
incmrk (nmrk)	selects symbols or lines for CURVE.

Routine	Meaning
licmod (cmod, ckey)	sets modes for the LIC algorithm.
licpts (xvmat, yvmat, nx, ny, itmat, iwmat, wmat)	calculates a Line Integral Convolution image of a vector field.
linfit (xray, yray, n, abrray, copt)	plots a fitted line.
marker (nsym)	sets the symbols plotted by CURVE.
mrkclr (nclr)	defines the colour of symbols plotted by CURVE.
nancrv (copt)	enables handling of NaN values in curves.
nocheck ()	suppresses listing of out of range data points.
piegrf (cbuf, nlin, xray, n)	plots a pie chart.
polcrv (copt)	defines the interpolation method used by CURVE.
resatt ()	resets curve attributes.
setres (nx, ny)	sets the size of coloured rectangles.
shdcrv (x1ray, y1ray, n1, x2ray, y2ray, n2)	plots shaded areas between curves.
splmod (ngrad, npts)	modifies spline interpolation.
stmmod (cmod, ckey)	sets streamline modes.
stmopt (n, ckey)	defines integer options for streamlines.
n = stmpts (xvmat, yvmat, nx, ny, xpray, ypray, x0, y0, xray, yray, nmax, n)	generates a streamline.
stmtri (xvray, yvray, xpray, ypray, n, ypray, n, i1ray, i2ray, i3ray, ntri, xsray, ysray, nray)	plots streamlines from triangulated data.
stmval (x, ckey)	defines floating point options for streamlines.
stream (xvmat, yvmat, nx, ny, xpray, ypray, xsray, ysray, n)	plots streamlines.
thkcrv (nthk)	defines the thickness of curves.
texture (itmat, nx, ny)	generates a texture array for LICPTS.
vecfld (xvray, yvray, xpray, ypray, n, ivec)	plots a vector field.
vecmat (xvmat, yvamt, nx, ny, xpray, ypray, ivec)	plots a vector field on a regular grid.

Figure A.11: Plotting Data Points

A.12 Legends

Routine	Meaning
frame (nfrm)	sets the frame thickness of legends.
legbgd (nclr)	defines the background colour of legends.
legend (cbuf, ncor)	plots legends.
legini (cbuf, nlin, nmaxln)	initializes legends. cbuf is a dummy string for Java.

Routine	Meaning
leglin (cbuf, cstr, ilin)	defines text for legend lines.
legopt (xf1, xf2, xf3)	modifies the appearance of legends.
legpat (ityp, ithk, isym, iclr, ipat, ilin)	stores curve attributes.
legpos (nxp, nyp)	determines the position of legends.
legsel (nray, n)	selects legend lines.
legtbl (n, copt)	sets the number of columns in table legends.
legtit (ctitle)	defines the legend title.
legtyp (ctype)	defines horizontal or vertical legend lines.
legval (x, copt)	modifies the appearance of legends.
linesp (xfac)	affects line spacing.
mixleg ()	enables multiple text lines in legends.
nxl = nxlegn (cbuf)	returns the width of legends in plot coordinates.
nyl = nylegn (cbuf)	returns the height of legends in plot coordinates.

Figure A.12: Legends

A.13 Line Styles and Shading Patterns

Routine	Meaning
chndot ()	sets a dotted-dashed line style.
chndsh ()	sets a dashed-dotted line style.
color (color)	sets a colour.
dash ()	sets a dashed line style.
dashl ()	sets a long-dashed line style.
dashm ()	sets a medium-dashed line style.
dot ()	sets a dotted line style.
dotl ()	sets a long-dotted line style.
hwmode (cmod, ckey)	enables or disables hardware features for line styles and shading patterns.
linclr (nray, n)	defines colours for line styles.
lintyp (itype)	defines a line style.
linwid (nwidth)	sets the line width.
lncap (copt)	sets the line cap parameter.
lnjoin (copt)	sets the line join parameter.
lnmlt (xfac)	sets the miter limit parameter.
myline (nray, n)	sets a user-defined line style.
mypat (iang, ityp, idens, icross)	defines a global shading pattern.
penwid (nwidth)	sets the pen width.
shdfac (xfac)	modifies the distance of scan lines for software shading.
shdpat (ipat)	selects a shading pattern.
solid ()	sets a solid line style.

Figure A.13: Line Styles and Shading Patterns

A.14 Cycles

Routine	Meaning
clrcyc (index, iclr)	modifies the colour cycle.
lincyc (index, itype)	modifies the line style cycle.
patcyc (index, ipat)	modifies the pattern cycle.

Figure A.14: Cycles

A.15 Base Transformations

Routine	Meaning
tr3axs (x, y, z, a)	defines a rotation about an arbitrary axis.
tr3res ()	resets 3-D base transformations.
tr3rot (xrot, yrot, zrot)	affects the 3-D rotation of plot vectors.
tr3scl (xscl, yscl, zscl)	affects the 3-D scaling of plot vectors.
tr3shf (xshf, yshf, zshf)	affects the 3-D shifting of plot vectors.
trfres ()	resets base transformations.
trfrot (xang, nx, ny)	affects the rotation of plot vectors.
trfscl (xscl, yscl)	affects the scaling of plot vectors.
trfshf (nx, ny)	affects the shifting of plot vectors.

Figure A.15: Base Transformations

A.16 Shielding

Routine	Meaning
shield (careax, cmode)	defines automatic shielding.
shlcir (nx, ny, nr)	defines circles as shielded areas.
shldel (id)	deletes shielded areas.
shlell (nx, ny, na, nb, t)	defines ellipses as shielded areas.
id = shlind ()	returns the index of a shielded area.
shlpie (nx, ny, nr, a, b)	defines pie segments as shielded areas.
shlpol (nxray, nyray, n)	defines polygons as shielded areas.
shlret (nx, ny, nw, nh, t)	defines rotated rectangles as shielded areas.
shlrec (nx, ny, nw, nh)	defines rectangles as shielded areas.
shlres (n)	deletes shielded areas.
shlvis (id, cmode)	enables or disables shielded areas.

Figure A.16: Shielding

A.17 Parameter Requesting Routines

Routine	Meaning
calf = getalf ()	returns the base alphabet.
n = getang ()	returns the current angle used for text and numbers.

Routine	Meaning
<code>nx,ny,nw,nh = getclp (idx)</code>	returns the current clipping window.
<code>n = getclr ()</code>	returns the current colour number.
<code>nx,ny,nz = getdig (idx)</code>	returns the number of decimal places used in labels.
<code>cdsp = getdsp ()</code>	returns the terminal type.
<code>cfil = getfil ()</code>	returns the current plotfile name.
<code>a,b,or,stp = getgrf (idx, cax)</code>	returns the scaling of the current axis system.
<code>n = gethgt ()</code>	returns the current character height.
<code>n = gethnm ()</code>	returns the character height of axis titles.
<code>xr,xg,xb = getind (i, idx)</code>	returns the RGB coordinates for a colour index.
<code>cx,cy,cz = getlab (idx)</code>	returns the current labels.
<code>nx,ny,nz = getlen (idx)</code>	returns the current axis lengths.
<code>n = getlev ()</code>	returns the current level.
<code>n = getlin ()</code>	returns the current line width.
<code>cmfl = getmfl ()</code>	returns the current file format.
<code>c = getmix (copt)</code>	returns shift characters for indices and exponents.
<code>nx,ny = getor (idx)</code>	returns the current origin.
<code>nx,ny = getpag (idx)</code>	returns the current page size.
<code>n = getpat ()</code>	returns the current shading pattern.
<code>n = getplv ()</code>	returns the patch level of Dislin.
<code>nx,ny = getpos (idx)</code>	returns the position of the axis system.
<code>nx,ny = getran (idx)</code>	returns the range of colour bars.
<code>nx,ny = getres (idx)</code>	returns the size of points used in 3-D colour graphics.
<code>xr,xb,xg = getr gb (idx)</code>	returns the RGB coordinates of the current colour.
<code>nx,ny,nz = getscl (idx)</code>	returns the current axis scaling.
<code>nx,ny,nz = getscm (idx)</code>	informs if automatic scaling is enabled.
<code>nw,nh = gets cr (idx)</code>	returns the screen size in pixels.
<code>c = getshf (copt)</code>	returns shift characters for European characters.
<code>nx,ny,nz = gets p1 (idx)</code>	returns the distance between axis ticks and labels.
<code>nx,ny,nz = gets p2 (idx)</code>	returns the distance between axis labels and names.
<code>nsym,nh = getsym (idx)</code>	returns the current symbol number and height.
<code>nmaj,nmin = gettcl (idx)</code>	returns the current tick lengths.
<code>nx,ny,nz = gettic (idx)</code>	returns the number of ticks plotted between labels.
<code>n = gettyp ()</code>	returns the current line style.
<code>n = getuni ()</code>	returns the current unit used for messages.
<code>x = getver ()</code>	returns the Dislin version number.
<code>nytit,nxbar,nybar = getvk (idx)</code>	returns the current lengths used for shifting.
<code>cvlt = getvlt ()</code>	returns the current colour table.
<code>n = getwid ()</code>	returns the width of colour bars.
<code>nx,ny,nw,nh = getwin ()</code>	returns the position and size of the graphics window.
<code>id = getxid ("WINDOW")</code>	returns the X window ID.
<code>n = gmxalf (copt, c1, c2)</code>	returns shift characters for additional alphabets.

Figure A.17: Parameter Requesting Routines

A.18 Elementary Plot Routines

Routine	Meaning
arcell (nx, ny, na, nb, alpha, beta, theta)	plots elliptical arcs.
areaf (nxray, nyray, n)	plots polygons.
circle (nx, ny, nr)	plots circles.
connpt (x, y)	plots a line to a point.
ellips (nx, ny, nr1, nr2)	plots ellipses.
line (nx, ny, nu, nv)	plots lines.
noarln ()	suppresses the outline of geometric figures.
pie (nx, ny, nr, a, b)	plots pie segments.
point (nx, ny, nb, nh, nc)	plots coloured rectangles where the position is defined by the centre point.
recfl (nx, ny, nw, nh, nc)	plots coloured rectangles.
rectan (nx, ny, nw, nh)	plots rectangles.
rndrec (nx, ny, nw, nh, iopt)	plots a rectangle with rounded corners.
rlarc (x, y, r1, r2, a, b, t)	plots elliptical arcs for user coordinates.
rlarea (xray, yray, n)	plots polygons for user coordinates.
rlcirc (x, y, r)	plots circles for user coordinates.
rllell (x, y, r1, r2)	plots ellipses for user coordinates.
rline (x, y, u, v)	plots lines for user coordinates.
rlpie (x, y, r, a, b)	plots pie segments for user coordinates.
rlpoin (x, y, nw, nh, nc)	plots coloured rectangles for user coordinates.
rlrec (x, y, xw, xh)	plots rectangles for user coordinates.
rlrnd (x, y, xw, xh, iopt)	plots for user coordinates a rectangle with rounded corners.
rlsec (x, y, r1, r2, a, b, ncol)	plots coloured pie sectors for user coordinates.
rlvec (x1, y1, x2, y2, ivec)	plots vectors for user coordinates.
rlwind (x, xp, yp, nw, a)	plots wind speed symbols for user coordinates.
sector (nx, ny, nr1, nr2, a, b, ncol)	plots coloured pie sectors.
strtpt (x, y)	moves the pen to a point.
triflc (xray, yray, icray, n)	plots solid filled rectangles.
triffl (xray, yray)	plots solid filled rectangles.
vecclr (nclr)	defines colour for arrow heads.
vecopt (xopt, ckey)	defines vector options.
vector (nx, ny, nu, nv, ivec)	plots vectors.
windbr (x, nx, ny, nw, a)	plots wind speed symbols.
xmove (x, y)	moves the pen to a point.
xdraw (x, y)	plots a line to a point.

Figure A.18: Elementary Plot Routines

A.19 Conversion of Coordinates

Routine	Meaning
colray (zray, nray, n)	converts Z-coordinates to colour numbers.
getico (x, y, xray)	converts a complex reflection factor to an impedance.
getrco (x, y, xray)	converts a complex impedance to a reflection factor.
n = nxpixl (ix, iy)	converts X plot coordinates to pixel.
n = nxposn (x)	converts X-coordinates to plot coordinates.
n = nypixl (ix, iy)	converts Y plot coordinates to pixel.
n = nyposn (y)	converts Y-coordinates to plot coordinates.
n = nzposn (z)	converts Z-coordinates to colour numbers.
trfco1 (xray, n, cfrom, cto)	converts one-dimensional coordinates.
trfco2 (xray, yray, n, cfr, cto)	converts two-dimensional coordinates.
trfco3 (xray, yray, zray, n, cfr, cto)	converts three-dimensional coordinates.
trfrel (xray, yray, n)	converts X- and Y-coordinates to plot coordinates.
x = xinvs (nx)	converts X plot coordinates to user coordinates.
x = xposn (x)	converts X-coordinates to real plot coordinates.
y = yinvs (ny)	converts Y plot coordinates to user coordinates.
y = yposn (y)	converts Y-coordinates to real plot coordinates.

Figure A.19: Conversion of Coordinates

A.20 Utility Routines

Routine	Meaning
bezier (xray, yray, n, xpray, ypray, np)	calculates a Bezier interpolation.
n = bitsi2 (nbits, ninp, iinp, nout, iout)	allows bit manipulation on 16 bit variables.
n = bitsi4 (nbits, ninp, iinp, nout, iout)	allows bit manipulation on 32 bit variables.
circ3p (x1, y1, x2, y2, x3, y3, xray)	calculates a circle specified by 3 points.
cstr = fcha (x, ndig)	converts floating point numbers to character strings.
n = flen (x, ndig)	calculates the number of digits for floating point numbers.
nh = histog (xray, n, xhray, yhray)	calculates a histogram.
cstr = intcha (nx)	converts integers to character strings.
n = intlen (nx)	calculates the number of digits for integers.
n = intutf (iray, nray, cstr, nmax)	converts Unicode numbers to an UTF8 string.
n = nlmess (cstr)	returns the length of character strings in plot coordinates.
n = nlnumb (x, ndig)	returns the length of numbers in plot coordinates.
n = polclp (xray, yray, n, x2ray, y2ray, nmax, cedge)	clips a polygon.
sortr1 (xray, n, copt)	sorts floating point numbers.
sortr2 (xray, yray, n, copt)	sorts points in the X-direction.

Routine	Meaning
npt = spline (xray, yray, n, xsray, ysray)	returns splined points as calculated in CURVE.
swapi2 (iray, n)	swaps the bytes of 16 bit integer variables.
swapi4 (iray, n)	swaps the bytes of 32 bit integer variables.
trfmat (zmat, nx, ny, zmat2, nx2, ny2)	converts matrices.
ntri = triang (xray, yray, n, i1ray, i2ray, i3ray, nmax)	calculates the Delaunay triangulation.
n = trmlen (cstr)	calculates the number of characters in character strings.
upstr (cstr)	converts a character string to uppercase letters.
n = utfint (cstr, iray, nray)	converts an UTF8 string to Unicode numbers.

Figure A.20: Utility Routines

A.21 Binary File I/O

Routine	Meaning
istat = closfl (nu)	closes a file.
istat = openfl (cfil, nu, irw)	opens a file for binary I/O.
istat = posifl (nu, nbyte)	skips to a certain position relative to the start.
n = readfl (nu, iray, nbyte)	reads a given number of bytes.
istat = skipfl (n, nbyte)	skips a number of bytes from the current position.
n = tellfl (nu)	returns the file position.
n = writfl (nu, iray, nbyte)	writes a given number of bytes.

Figure A.21: Binary File I/O

A.22 Date Routines

Routine	Meaning
basdat (id, im, iy)	defines the base date.
n = incdat (id, im, iy)	returns incremented days.
n = nwkdag (id, im, iy)	returns the weekday of a date.
trfdat (n, id, im, iy)	converts incremented days to a date.

Figure A.22: Date Routines

A.23 Cursor Routines

Routine	Meaning
n = csrkey ()	returns a character key.
csrlin (iray)	returns the end points of a line.
n = csrmov (nxray, nyray, nmax)	collects cursor movements.
n = csrpol (nxray, nyray, nmax)	returns collected cursor positions.
nkey = csrpos (nxyray)	sets and returns the cursor position.
nx,ny = csrpt1 (idx)	returns a pressed cursor position.
n = csrpts (nxray, nyray, nmax)	collects cursor positions.
csrrec (iray)	returns opposite corners of a rectangle.
csrtyp (copt)	selects the cursor type.
csruni (copt)	selects the unit of returned cursor positions.
setcsr (copt)	defines the cursor type of the graphics window.

Figure A.23: Cursor Routines

A.24 Transparency

Routine	Meaning
tprfin ()	terminates alpha blending.
tprini ()	initializes alpha blending.
tprmod (cmode, ckey)	modifies alpha blending.
tprval (x)	sets the alpha value.

Figure A.24: Transparency

A.25 Bar Graphs

Routine	Meaning
barbor (iclr)	defines the colour of bar borders.
barclr (ic1, ic2, ic3)	defines bar colours.
bargrp (ngrp, gap)	affects clustered bars.
barmod (cmode, copt)	enables variable bars.
baropt (xf, ang)	modifies the appearance of 3-D bars.
barpos (copt)	selects predefined positions for bars.
bars (xray, y1ray, y2ray, n)	plots bar graphs.
bartyp (copt)	selects vertical or horizontal bars.
chnbar (copt)	modifies the appearance of bars.
labclr (nclr, "BARS")	defines the colour of bar labels.
labdig (ndig, "BARS")	defines the number of decimal places in bar labels.
labels (copt, "BARS")	defines bar labels.
labpos (copt, "BARS")	defines the position of bar labels.

Figure A.25: Bar Graphs

A.26 Pie Charts

Routine	Meaning
chnpie (copt)	defines colour and pattern attributes for pie segments.
labclr (nclr, "PIE")	defines the colour of segment labels.
labdig (ndig, "PIE")	defines the number of decimal places in segment labels.
labels (copt, "PIE")	defines pie labels.
labpos (copt, "PIE")	defines the position of segment labels.
labtyp (copt, "PIE")	modifies the appearance of segment labels.
piebor (iclr)	defines the colour of pie borders.
piecbk (Routine)	defines a callback routine for PIEGRF.
pieclr (ic1ray, ic2ray, n)	defines pie colours.
pieexp ()	defines exploded pie segments.
piegrf (cbuf, nlin, xray, n)	plots pie charts.
pielab (clab, cpos)	sets additional character strings plotted in segment labels.
pieopt (xf, ang)	modifies the appearance of 3-D pies.
pierot (angle)	sets a rotation angle for 2-D pie charts.
pietyp (copt)	selects 2-D of 3-D pie charts.
pieval (x, ckey)	modifies parameters for pie charts.
pievec (ivec, copt)	modifies the arrow plotted between labels and segments.

Figure A.26: Pie Charts

A.27 Coloured 3-D Graphics

Routine	Meaning
ax3len (nx, ny, nz)	defines axis lengths.
colran (nx, ny)	defines the range of colour bars.
crvmat (zmat, n, m, ixp, iyp)	plots a coloured surface.
crvqdr (xray, yray, zray, n)	plots coloured quadrangles.
crvtri (xray, yray, zray, n, i1ray, i2ray, i3ray, ntri)	plots the coloured surface of an Delaunay triangulation.
curve3 (xray, yray, zray, n)	plots coloured rectangles.
curvx3 (xray, y, zray, n)	plots rows of coloured rectangles.
curvy3 (x, yray, zray, n)	plots columns of coloured rectangles.
erase ()	erases the screen.
frmbar (nfrm)	defines the thickness of frames around colour bars.
graf3 (xa, xe, xor, xstp, ya, ye, ya, ye, yor, ystp, za, ze, zor, zstp)	plots a coloured axis system.
jusbar (copt)	defines the alignment of colour bars.
nobar ()	suppresses the plotting of colour bars.
nobgd ()	suppresses the plotting of points which have the same colour as the background.
n = nzposn (z)	converts a Z-coordinate to a colour number.
point (nx, ny, nb, nh, nc)	plots coloured rectangles where the position is defined by the centre point.
posbar (copt)	sets the position of colour bars.
recfl (nx, ny, nw, nh, nc)	plots coloured rectangles.
rlpoin (x, y, nw, nh, nc)	plots coloured rectangles for user coordinates.
rlsec (x, y, r1, r2, a, b, ncol)	plots coloured pie sectors for user coordinates.
sector (nx, ny, nr1, nr2, a, b, ncol)	plots coloured pie sectors.
setres (nx, ny)	defines the size of coloured rectangles.
spcbar (nspc)	sets the space between colour bars and axis systems.
vkxbar (nshift)	shifts colour bars in the X-direction.
vkybar (nshift)	shifts colour bars in the Y-direction.
widbar (nw)	defines the width of colour bars.
zaxis (za, ze, zor, zstp, nl, cstr, it, id, nx, ny)	plots a linearly scaled colour bar.
zaxlg (za, ze, zor, zstp, nl, cstr, it, id, nx, ny)	plots a logarithmically scaled colour bar.

Figure A.27: Coloured 3-D Graphics

A.28 3-D Graphics

Routine	Meaning
<p>abs3pt (x, y, z, xyray) axis3d (x, y, z) bars3d (xray, yray, z1ray, z2ray, xwray, ywray, icray, n) box3d () cone3d (xm, ym, zm, r, h1, h2, n, m) conn3d (x, y, z) conshd3d (xray, n, yray, m, zmat, zlvray, nlev) curv3d (xray, yray, zray, n) curv4d (xray, yray, zray, wray, n) cyli3d (xm, ym, zm, r, h, n, m) dbffin () iret = dbfini () dbfmod (cmod) disk3d (xm, ym, zm, r1, r2, n, m) field3d (x1ray, y1ray, z1ray, x2ray, y2ray, z2ray, n, ivec) flab3d () nclr = getlit (xp, yp, zp, xn, yn, zn) getmat (xray, yray, zray, n, zmat, nx, ny, zv) graf3d (xa, xe, xor, xstp, ya, ye, yor, ystp, za, ze, zor, zstp) grffin () grfimg (cfil) grfni (x1, y1, z1, x2, y2, z2, x3, y3, z3) grid3d (nx, ny, copt) hsym3d (xh) n = isopts (xray, nx, yray, ny, zray, nz, wmat, wlev, xtri, ytri, ztri, nmax) labl3d (copt) light (cmode) litmod (id, cmode) litop3 (id, xr, xg, xb, ctype) litopt (id, xval, ctype) litpos (id, xp, yp, zp, copt) matop3 (xr, xg, xb, ctype) matopt (xval, ctype) mdfmat (ix, iy, w)</p>	<p>converts absolute 3-D coordinates to plot coordinates. defines the lengths of the 3-D box. plots 3-D bars. plots a border around the 3-D box. plots a cone. plots a line to a point in 3-D space. plots 3-D contours. plots curves or symbols. plots coloured 3-d symbols. plots a cylinder. terminates a depth sort. initializes a depth depth sort. can disable the depth sort. plots a disk. plots a vector field. disables the suppression of axis labels. calculates colour values. calculates a function matrix from randomly distributed data points. plots an axis system. terminates a projection into 3-D space. includes an image into 3-D space. initializes projections in 3-D space. plots a grid. sets the height of 3-D symbols. calculates isosurfaces. modifies the appearance of labels on the 3-D box. turns lighting on or off. turns single light sources on or off. modifies light parameters. modifies light parameters. sets the position of light sources. modifies material parameters. modifies material parameters. modifies the algorithm used in GETMAT.</p>

Routine	Meaning
<p>mshclr (iclr)</p> <p>mshcrv (n)</p> <p>nohide ()</p> <p>pike3d (x1, y1, z1, x2, y2, z2, r, nsk1, nsk2)</p> <p>plat3d (xm, ym, zm, xl, copt)</p> <p>plyfin (cfil, cobj)</p> <p>plyini (copt)</p> <p>pos3pt (x, y, z, xyzray)</p> <p>pyra3d (xm, ym, zm, xl, h1, h2, n)</p> <p>quad3d (xm, ym, zm, xl, yl, zl)</p> <p>rel3pt (x, y, z, xyray)</p> <p>rot3d (a, b, c)</p> <p>setfce (copt)</p> <p>shlsur ()</p> <p>sphe3d (xm, ym, zm, r, n, m)</p> <p>n = stmpts3d (xv, yv, zv, nx, ny, nz, xpray, ypray, zpray, x0, y0, z0, xray, yray, zray, nmax)</p> <p>stream3d (xv, yv, zv, nx, ny, nz, xpray, ypray, zpray, xsray, ysray, n)</p> <p>strt3d (x, y, z)</p> <p>surclr (itop, ibot)</p> <p>surfce (xray, nx, yray, ny, zmat)</p> <p>surfcp (cfunc, a1, a2, astp, b1, b2, bstp)</p> <p>surfun (cfunc, ixp, xdel, iyp, ydel)</p> <p>suriso (xray, nx, yray, ny, zray, nz, wmat, wlev)</p> <p>surmat (zmat, nx, ny, ixpts, iypts)</p> <p>surmsh (copt)</p> <p>suropt (copt)</p> <p>surshc (xray, nx, yray, ny, zmat, wmat)</p> <p>surshd (xray, nx, yray, ny, zmat)</p> <p>surtri (xray, yray, zray, n, i1ray, i2ray, i3ray, ntri)</p> <p>survis (copt)</p> <p>symb3d (n, xm, ym, zm)</p> <p>thkc3d (nthk)</p> <p>torus3d (xm, ym, zm, r1, r2, h, a1, a2, n, m)</p> <p>tube3d (x1, y1, z1, x2, y2, z2, r, n, m)</p>	<p>defines the colour of surface meshes.</p> <p>sets the resolution of meshes for 3-D curves.</p> <p>disables the hidden-line algorithm.</p> <p>plots a cone.</p> <p>plots a Platonic solid.</p> <p>terminates output of polygons to a PLY format.</p> <p>initializes output of polygons to a PLY format.</p> <p>converts user coordinates to absolute 3-D coordinates.</p> <p>plots a pyramid.</p> <p>plots a quad.</p> <p>converts user coordinates to plot coordinates.</p> <p>defines rotation angles for symbols and solids.</p> <p>sets a face side for defining material parameters.</p> <p>protects surfaces from overwriting.</p> <p>plots a sphere.</p> <p>generates a streamline.</p> <p>plots streamlines.</p> <p>moves the pen to a point.</p> <p>selects surface colours.</p> <p>plots the surface of a function matrix.</p> <p>plots the surface of a parametric function.</p> <p>plots the surface grid of a function.</p> <p>plots isosurfaces.</p> <p>plots the surface of a function matrix.</p> <p>enables grid lines for surfcp and surshd.</p> <p>suppresses surface lines for surfce.</p> <p>plots a coloured surface.</p> <p>plots a coloured surface.</p> <p>plots the surface of an Delaunay triangulation.</p> <p>determines the visible part of surfaces.</p> <p>plots a 3-D symbol.</p> <p>defines the thickness of 3-D curves.</p> <p>plots a torus.</p> <p>plots a tube.</p>

Routine	Meaning
vang3d (ang)	defines the field of view.
vecf3d (xvray, yvray, zvray, xpray, ypray, zpray, n, ivec)	plots a vector field.
vecmat3d (xv, yv, zv, nx, ny, nz, xpray, ypray, zpray, ivec)	plots a vector field on a regular grid.
vctr3 (x1, y1, z1, x2, y2, z2, ivec)	plots vectors in 3-D space.
vfoc3d (x, y, z, copt)	defines the focus point.
view3d (x, y, z, copt)	defines the viewpoint.
vsc13d (xfac)	sets a scaling factor for orthographic view.
vtx3d (xray, yray, zray, n, copt)	plots faces from vertices.
vtxc3d (xray, yray, zray, icray, n, copt)	plots faces from vertices.
vtxn3d (xray, yray, zray, xnray, ynray, znray, n, copt)	plots faces from vertices.
vup3d (ang)	defines the camera orientation.
zbfers ()	erases the frame buffer of a Z-buffer.
zbf fin ()	terminates the Z-buffer.
iret = zbfini ()	allocates space for a Z-buffer.
zbf lin (x1, y1, z1, x2, y2, z2)	plots lines.
zbf mod (cmod)	can disable the Z-buffer.
zbf res ()	resets the Z-buffer.
zbf scl (x)	scales the internal image for PDF output.
zbf tri (xray, yray, zray, iray)	plots triangles.
zscale (zmin, zmax)	defines a Z-scaling for coloured surfaces.

Figure A.28: 3-D Graphics

A.29 Geographical Projections

Routine	Meaning
curvmp (xray, yray, n)	plots curves or symbols.
grafmp (xa, xe, xor, xstp, ya, ye, yor, ystp)	plots a geographical axis system.
gridmp (nx, ny)	plots a grid.
mapbas (copt)	defines the base map.
mapfil (cfil, copt)	defines an external map file.
mapimg (cfil, x1, x2, x3, x4, x5, x6)	plots a BMP or GIF map image.
maplab (copt, ckey)	defines label options.
maplev (copt)	specifies land or lake plotting.
mapmod (copt)	modifies the connection of points used in CURVMP.
mapopt (copt, ckey)	defines map options.
mappol (xpol, ypol)	defines the map pole used for azimuthal projections.
mapref (ylw, yup)	defines two latitudes used for conical projections.
pos2pt (x, y, xyray)	converts user coordinates to plot coordinates.
projet (copt)	selects a projection.

Routine	Meaning
labclr (nclr, "CONT") labdis (ndis, "CONT") labels (copt, "CONT") shdmod (copt, "CONT") ncrv = tripts (xray, yray, zray, n, i1ray, i2ray, i3ray, ntri, zlev, xpts, ypts, maxpts, iray, maxcrv)	defines the colour of contour labels. defines the distance between labels. defines contour labels. sets the algorithm for shaded contours. generates contours from triangulated data.

Figure A.30: Contouring

A.31 Image Routines

Routine	Meaning
expimg (cfil, copt)	copies an image from memory to a file.
imgbox (nx, ny, nw, nh)	defines a rectangle for PostScript/PDF output.
imgclp (nx, ny, nw, nh)	defines a clipping rectangle.
imgfin ()	terminates transferring of image data.
imgini ()	initializes transferring of image data.
imgmod (cmod)	selects index or RGB mode.
imgsiz (nw, nh)	defines an image size for PostScript/PDF output.
imgtpr (nclr)	defines a transparency colour for images.
iret = ldimg (cfil, isray, nmax, nc)	loads an image into an array.
n = rbfpng (cbuf, nmax)	stores an image as PNG file in a buffer. The memory
n = rbfpng (cbuf, nmax)	stores an image as PNG file in a buffer.
rbmp (cfil)	stores an image as a BMP file.
rgif (cfil)	stores an image as a GIF file.
rimage (cfil)	copies an image from memory to a file.
iclr = rpixel (ix, iy)	reads a pixel from memory.
rpixls (iray, ix, iy, nw, nh)	reads image data from memory to a byte array.
rpng (cfil)	stores an image as a PNG file.
rppm (cfil)	stores an image as a PPM file.
rpxrow (iray, nx, ny, n)	reads a row of image data from memory.
rtiff (cfil)	stores an image as a TIFF file.
tiforg (nx, ny)	defines the position of TIFF files copied with WTIFF.
tifwin (nx, ny, nw, nh)	defines a clipping window for TIFF files copied with WTIFF.
wimage (cfil)	copies an image from file to memory.
wpixel (ix, iy, iclr)	writes a pixel to memory.
wpixls (iray, ix, iy, nw, nh)	writes image data from a byte array to memory.
wpxrow (iray, nx, ny, n)	write a row of image data to memory.
wtiff (cfil)	copies a TIFF file created by Dislin to memory.

Figure A.31: Image Routines

A.32 Window Routines

Routine	Meaning
clswin (id)	closes a window.
hidwin (id, copt)	defines whether a window is visible or not.
opnwin (id)	opens a window for graphics output.
pagwin (nxp, nyp)	defines page formats for windows.
selwin (id)	selects a window for graphics output.
winapp (capp)	defines a window or console application.
wincbk (crou, copt)	defines a callback routine for the windows size.
window (nx, ny, nw, nh)	defines the position and size of windows.
winico (cstr)	loads an icon for the windows title bar.
id = winid ()	returns the ID of the currently selected window.
winjus (copt)	defines the position of the graphics window.
winkey (ckey)	defines a key that can be used for program continuation in DISFIN.
winmod (copt)	affects the handling of windows in DISFIN.
winsiz (nw, nh)	defines the size of windows.
wintit (cstr)	sets the title of the currently selected window.
wintyp (copt)	sets the type of the graphics window.
x11mod (copt)	enables backing store.

Figure A.32: Window Routines

A.33 Widget Routines

Routine	Meaning
doevnt ()	processes pending events.
ival = dwgbut (cstr, ival)	displays a message that can be answered with 'Yes' or 'No'.
iret = dwgerr ()	returns a status for dialog widget routines.
cfil = dwgfil (clab, cfil, cmask)	creates a file selection box.
isel = dwglis (clab, clis, isel)	gets a selection from a list of items.
dwgmsg (cstr)	displays a message.
cstr = dwgtxt (clab, cstr)	prompts an user for input.
n = gwgatt (id, copt)	requests widget attributes.
n = gwgbox (id)	requests the value of a box widget.
n = gwgbut (id)	requests the status of a button widget.
cfil = gwgfil (id)	requests the value of a file widget.
x = gwgflt (id)	requests the value of a text widget as real number.
n = gwggui ()	returns the used GUI.
n = gwgint (id)	requests the value of a text widget as integer.
n = gwglis (id)	requests the value of a list widget.
x = gwgscl (id)	requests the value of a scale widget.

Routine	Meaning
nw,nh = gwgsiz (id, idx)	returns the size of widgets.
x = gwgtbf (id, irow, icol)	requests the value of a table cell as real number.
ix = gwgtbi (id, irow, icol)	requests the value of a table cell as integer.
gwgtbl (id, xray, n, idx, copt)	requests the values of table cells.
cstr = gwgtbs (id, irow, icol)	requests the value of a table cell as a string.
cstr = gwgtxt (id)	requests the value of a text widget.
n = gwgxid (id)	requests the windows ID of a widget.
clis = itmncat (clis, n, citem)	concatenates an element to a list string.
n = itmcnt (clis)	calculates the number of elements in a list string.
citem = itmstr (clis, n)	extracts an element from a list string.
msgbox (cstr)	displays a message.
swgatt (id, catt, copt)	sets widget attributes.
swgbgd (id, xr, xg, xb)	changes the background colour of widgets.
swgbox (id, isel)	changes the selection of a box widget.
swgbut (id, ival)	changes the status of a button widget.
swgcb2 (id, crout)	connects a callback routine with a table widget.
swgcbk (id, crout)	connects a callback routine with a widget.
swgclr (xr, xg, xb, copt)	sets widget colours.
swgdrw (xf)	defines the height of draw widgets.
swfgfd (id, xr, xg, xb)	changes the foreground colour of widgets.
swgfil (id, cfil)	changes the value of a file widget.
swgflt (id, x, ndig)	changes the value of text widgets.
swgfnt (cfnt, npts)	defines widget fonts.
swgfoc (id)	sets the keyboard focus.
swghlp (cstr)	sets a character string for the Help menu.
swgint (id, n)	changes the value of text widgets.
swgiop (i, copt)	sets integer options for widgets.
swgjus (cjus, class)	defines the alignment of label widgets.
swglis (id, isel)	changes the selection of a list widget.
swgmix (char, cmix)	defines control characters.
swgmrg (ival, cmrg)	defines widget margins.
swgopt (copt, ckey)	sets a center option for parent widgets.
swgpop (copt)	modifies the appearance of the popup menubar.
swgpos (nx, ny)	defines the position of widgets.
swgray (xray, n, copt)	defines the width of columns in table widgets.
swgscl (id, xval)	changes the value of a scale widget.
swgsiz (nw, nh)	defines the size of widgets.
swgspc (xspc, yspc)	modifies the spaces between widgets.
swgstp (xstp)	defines a step value for scale widgets.
swgtbf (id, x, ndig, i, j, copt)	changes the values of table cells.
swgtbi (id, ix, i, j, copt)	changes the values of table cells.
swgtbl (id, xray, n, ndig, idx, copt)	changes the values of table cells.

Routine	Meaning
swgtbs (id, cstr, i, j, copt) swgtit (cstr) swgtxt (id, cval) swgtyp (ctype, class) swgval (id, xval) swgwin (nx, ny, nw, nh) swgwth (nwth) id = wgapp (ip, clab) id = wgappb (ip, iray, nw, nh) id = wgbas (ip, copt) id = wgbox (ip, clis, isel) id = wgbut (ip, cval, ival) id = wgcmd (ip, clab, cmd) id = wgdli (ip, clis, isel) id = wgdrow (ip) id = wgfil (ip, clab, cfil, cmask) wgfin () id = wgicon (ip, clab, nw, nh, cfl) id = wgimg (ip, clab, iray, nw, nh) id = wgin (copt) id = wglab (ip, cstr) id = wglis (ip, clis, isel) id = wgltxt (ip, clab, cstr, nw) id = wgok (ip) id = wgpbar (ip, x1, x2, xstp) id = wgpbut (ip, clab) id = wgpicon (ip, clab, nw, nh, cfl) id = wgpimg (ip, clab, iray, nw, nh) id = wgpop (ip, cstr) id = wgpob (ip, iray, nw, nh) id = wgquit (ip) id = wgscl (ip, clab, xmin, xmax, xval, ndez) id = wgsep (ip) id = wgstxt (ip, nsize, nmax) id = wgtbl (ip, nrows, ncols) id = wgtxt (ip, cstr)	changes the values of table cells. sets a title for the main widget. changes the value of a text widget. modifies the appearance of widgets. changes the value of progress bars. defines the position and size of widgets. sets the default width of widgets. creates an entry in a popup menu. uses an image as entry in a popup menu. creates a container widget. creates a list widget where the list elements are displayed as toggle buttons. creates a button widget. creates a push button widget for a system command. creates a dropping list widget. creates a draw widget. creates a file widget. terminates widget routines. creates a label widget with an icon as label. creates a label widget with an image as label. creates a main widget and initializes widget routines. creates a label widget. creates a list widget. creates a labeled text widget. creates an OK push button widget. creates a progress bar. creates a push button widget. creates a push button with an icon as label. creates a push button with an image as label. creates a popup menu. uses an image as a popup menu. creates a Quit push button widget. creates a scale widget. creates a separator widget. creates a scrolled text widget. creates a table widget. creates a text widget.

Figure A.33: Widget Routines

A.34 Dislin Quickplots

Routine	Meaning
qplbar (xray, n)	plots a bar graph.
qplclr (zmat, n, m)	plots a coloured surface.
qplcon (zmat, n, m, nlv)	makes a contour plot.
qplcrv (xray, yray, n, copt)	plots multiple curves.
qplot (xray, yray, n)	plots a curve.
qplpie (xray, yray, n)	plots a pie chart.
qplsca (xray, yray, n)	makes a scatter plot.
qplscl (a, e, or, step, copt)	sets a user-defined scaling.
qplsur (zmat, n, m)	plots a surface.

Figure A.34: Dislin Quickplots

A.35 Using Threads

Routine	Meaning
thrfin ()	terminates threads.
thrini (n)	enables threads.

Figure A.35: Using Threads

A.36 Reading FITS Files

Routine	Meaning
fitscls ()	closes a FITS file.
x = fitsflt (ckey)	returns the floatingpoint value of a key.
n = fitsimg (iray, nmax)	copies a FITS image to an array.
istat = fitsopn (cfil)	opens a FITS file for reading.
cval = fitsstr (ckey)	returns the string value of a key.
n = fitstyp (ckey)	returns the type of a key.
n = fitsval (ckey)	returns the integer value of a key.

Figure A.36: Reading FITS Files

A.37 MPS Logo

Routine	Meaning
mpslogo (nx, ny, nsize, copt)	plots the MPS logo.

Figure A.37: MPS Logo

Appendix B

Examples

This appendix presents some examples of the Dislin manual in Java coding. They can be found in the Dislin subdirectory java.

The examples can be compiled with the command `'javac example.java'` and executed with the command `'java example'`.

B.1 Demonstration of CURVE

```
import de.dislin.Dislin;
public class curve {
    public static void main (String args []) {
        int n = 100, i, ic;
        double x, fpi = 3.1415926/180., step = 360. / (n-1);

        float xray [] = new float [n];
        float y1ray [] = new float [n];
        float y2ray [] = new float [n];

        for (i = 0; i < n; i++) {
            xray[i] = (float) (i * step);
            x = xray[i] * fpi;
            y1ray[i] = (float) Math.sin (x);
            y2ray[i] = (float) Math.cos (x);
        }

        Dislin.metafl ("cons");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.axspos (450, 1800);
        Dislin.axslen (2200, 1200);
        Dislin.name ("X-axis", "x");
        Dislin.name ("Y-axis", "y");
        Dislin.labdig (-1, "x");
        Dislin.ticks (10, "xy");
        Dislin.titlin ("Demonstration of CURVE", 1);
        Dislin.titlin ("SIN(X), COS(X)", 3);

        ic = Dislin.intrgb(0.95f, 0.95f, 0.95f);
        Dislin.axsbgd(ic);
        Dislin.graf (0.f, 360.f, 0.f, 90.f,
                    -1.f, 1.f, -1.f, 0.5f);
        Dislin.setrgb(0.7f, 0.7f, 0.7f);
        Dislin.grid(1,1);

        Dislin.color ("fore");
        Dislin.box2d ();
        Dislin.height (50);
        Dislin.title ();
        Dislin.color ("red");
        Dislin.curve (xray, y1ray, n);
        Dislin.color ("green");
        Dislin.curve (xray, y2ray, n);
        Dislin.disfin ();
    }
}
```

Demonstration of CURVE

$\text{SIN}(X)$, $\text{COS}(X)$

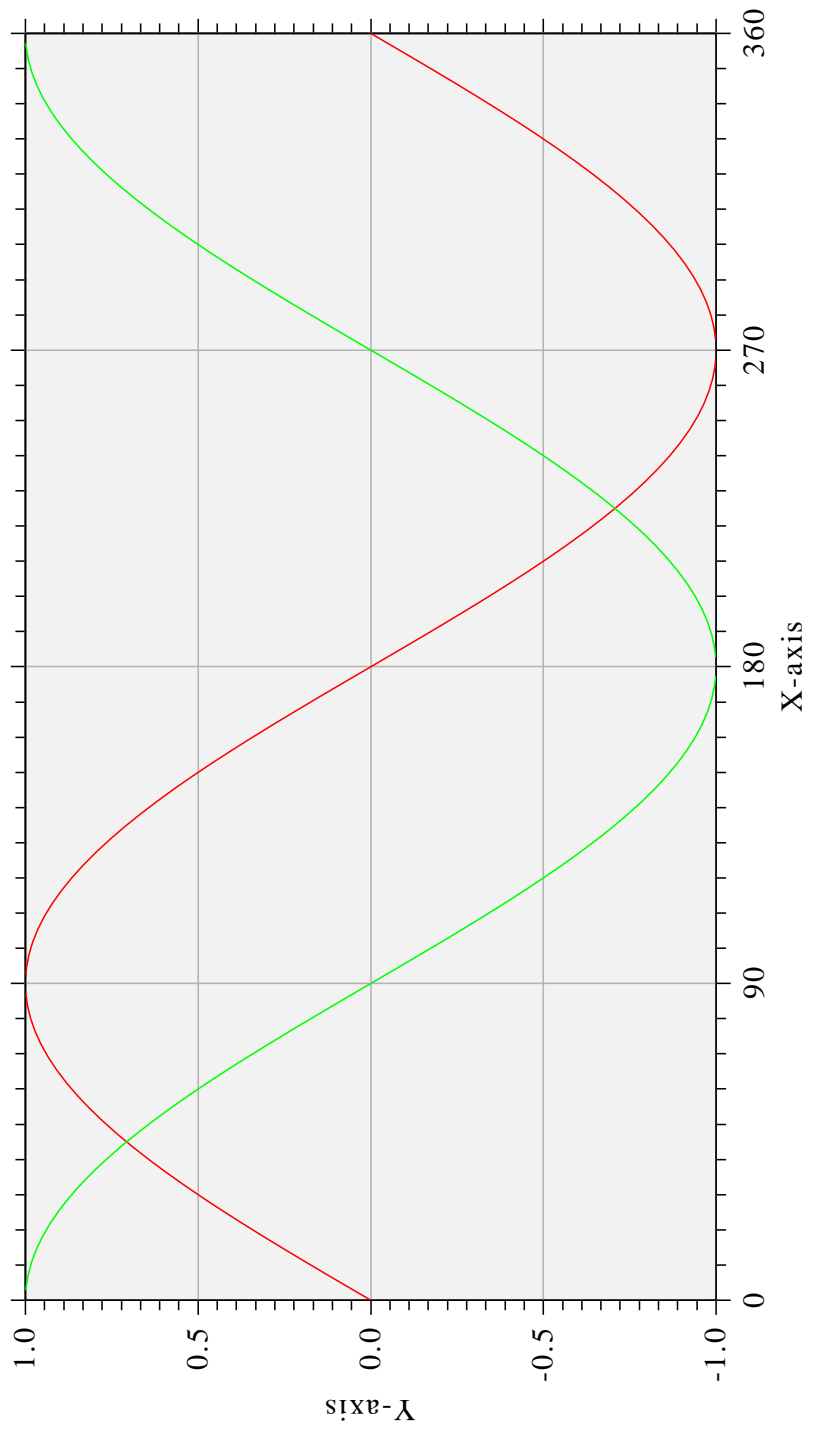


Figure B.1: Demonstration of CURVE

B.2 Symbols

```
import de.dislin.Dislin;
public class symbols {
    public static void main (String args []) {
        int ny = 150, nxp = 0, nl, i;
        String ctit = "Symbols", cstr = " ";

        Dislin.metafl ("cons");
        Dislin.setpag ("da4p");
        Dislin.disini ();
        Dislin.color ("yellow");
        Dislin.pagera ();
        Dislin.complx ();
        Dislin.paghdr ("H. Michels  (" , ")", 2, 0);

        Dislin.height (60);
        nl = Dislin.nlmess (ctit);
        Dislin.messag (ctit, (2100 - nl) / 2, 200);

        Dislin.height (50);
        Dislin.hsymb1 (120);

        for (i = 0; i < 24; i++) {
            if ((i % 4) == 0) {
                ny += 400;
                nxp = 550;
            }
            else {
                nxp += 350;
            }

            cstr = "" + i;
            nl = Dislin.nlmess (cstr) / 2;
            Dislin.messag (cstr, nxp - nl, ny + 150);
            Dislin.symbol (i, nxp, ny);
        }
        Dislin.disfin ();
    }
}
```

Symbols



0



1



2



3



4



5



6



7



8



9



10



11



12



13



14



15



16



17



18



19



20



21



22



23

H. Michels (12.01.2012, 15:51:05, DISLIN 10.2)

Figure B.2: Symbols

B.3 Logarithmic Scaling

```
import de.dislin.Dislin;
public class logscl {
    public static void main (String args []) {
        int i, nya;
        String ctit = "Logarithmic Scaling";
        String clab [] = {"LOG", "FLOAT", "ELOG"};

        Dislin.setpag ("da4p");
        Dislin.metafl ("cons");

        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();
        Dislin.axslen (1400, 500);

        Dislin.name ("X-axis", "X");
        Dislin.name ("Y-axis", "Y");
        Dislin.axsscl ("LOG", "XY");

        Dislin.titlin (ctit, 2);

        for (i = 0; i < 3; i++) {
            nya = 2650 - i * 800;
            Dislin.labdig (-1, "XY");
            if (i == 1) {
                Dislin.labdig (1, "Y");
                Dislin.name (" ", "X");
            }
            Dislin.axspos (500, nya);
            Dislin.messag ("Labels: " + clab[i], 600, nya - 400);
            Dislin.labels (clab[i], "XY");
            Dislin.graf (0.f, 3.f, 0.f, 1.f,
                       -1.f, 2.f, -1.f, 1.f);

            if (i == 2) {
                Dislin.height (50);
                Dislin.title ();
            }
            Dislin.endgrf ();
        }
        Dislin.disfin ();
    }
}
```

Logarithmic scaling

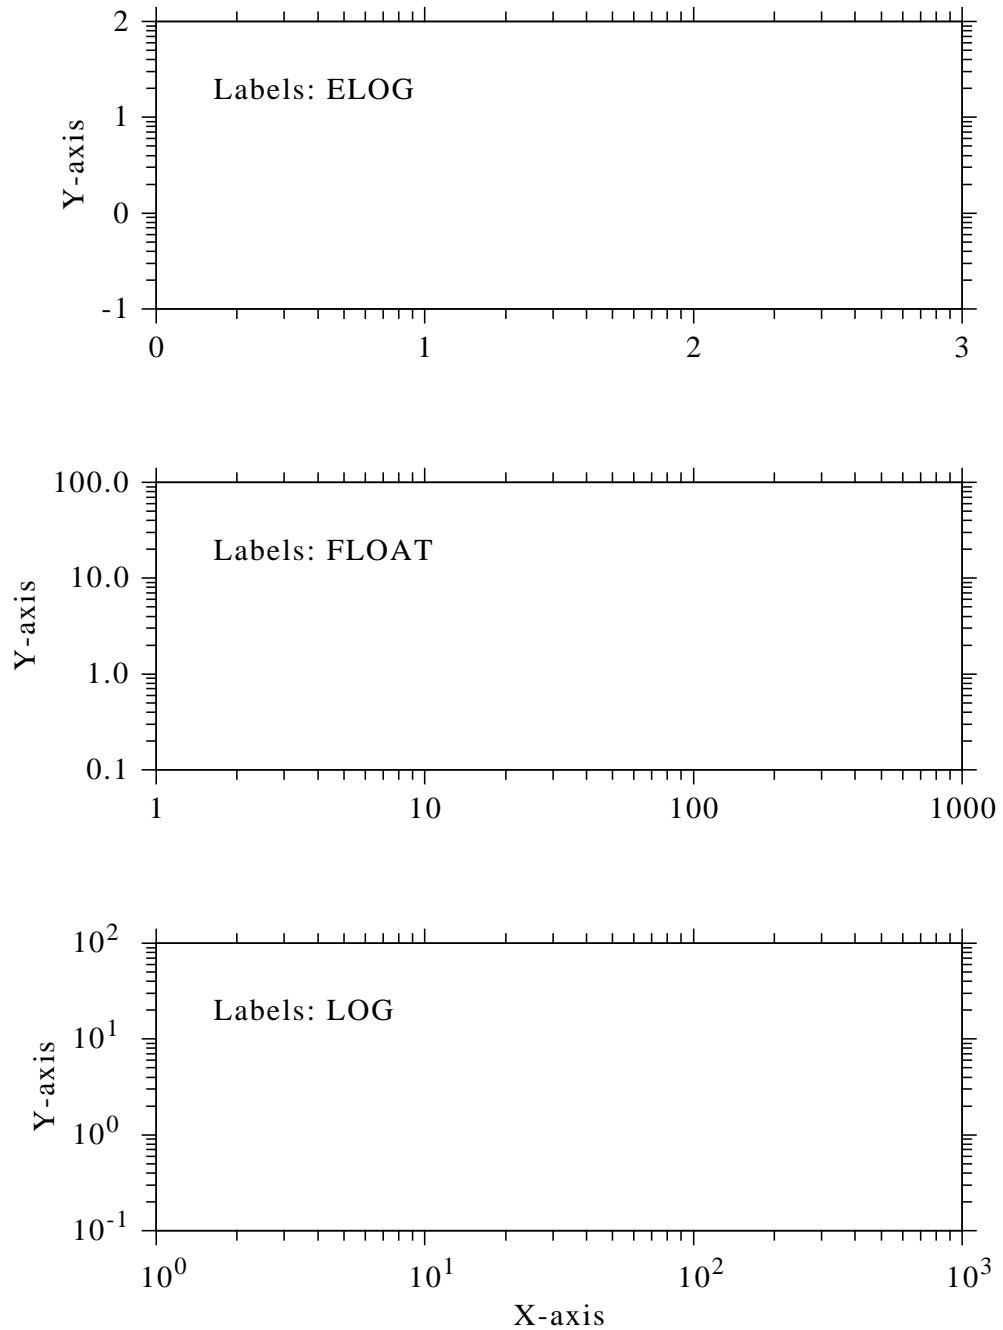


Figure B.3: Logarithmic Scaling

B.4 Interpolation Methods

```
import de.dislin.Dislin;
public class intpol {
    public static void main (String args []) {
        int i, nya = 2700, nx, ny;
        String ctit = "Interpolation Methods";
        float xray [] = {0.f, 1.f, 3.f, 4.5f, 6.f, 8.f, 9.f, 11.f,
            12.f, 12.5f, 13.f, 15.f, 16.f, 17.f, 19.f, 20.f};
        float yray [] = {2.f, 4.f, 4.5f, 3.f, 1.f, 7.f, 2.f, 3.f,
            5.f, 2.f, 2.5f, 2.f, 4.f, 6.f, 5.5f, 4.f};
        String cpol [] = {"SPLINE", "STEM", "BARS", "STAIRS",
            "STEP", "LINEAR"};

        Dislin.setpag ("da4p");
        Dislin.metafl ("cons");

        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.incmrk (1);
        Dislin.hsymb1 (25);
        Dislin.titlin (ctit, 1);
        Dislin.axslen (1500, 350);
        Dislin.setgrf ("LINE", "LINE", "LINE", "LINE");

        for (i = 0; i < 6; i++) {
            Dislin.axspos (350, nya - i * 350);
            Dislin.polcrv (cpol[i]);
            Dislin.marker (0);
            Dislin.graf (0.f, 20.f, 0.f, 5.f,
                0.f, 10.f, 0.f, 5.f);
            nx = Dislin.nxposn (1.f);
            ny = Dislin.nyposn (8.f);
            Dislin.messag (cpol[i], nx, ny);
            Dislin.curve (xray, yray, 16);

            if (i == 5) {
                Dislin.height (50);
                Dislin.title ();
            }
            Dislin.endgrf ();
        }
        Dislin.disfin ();
    }
}
```


Interpolation Methods

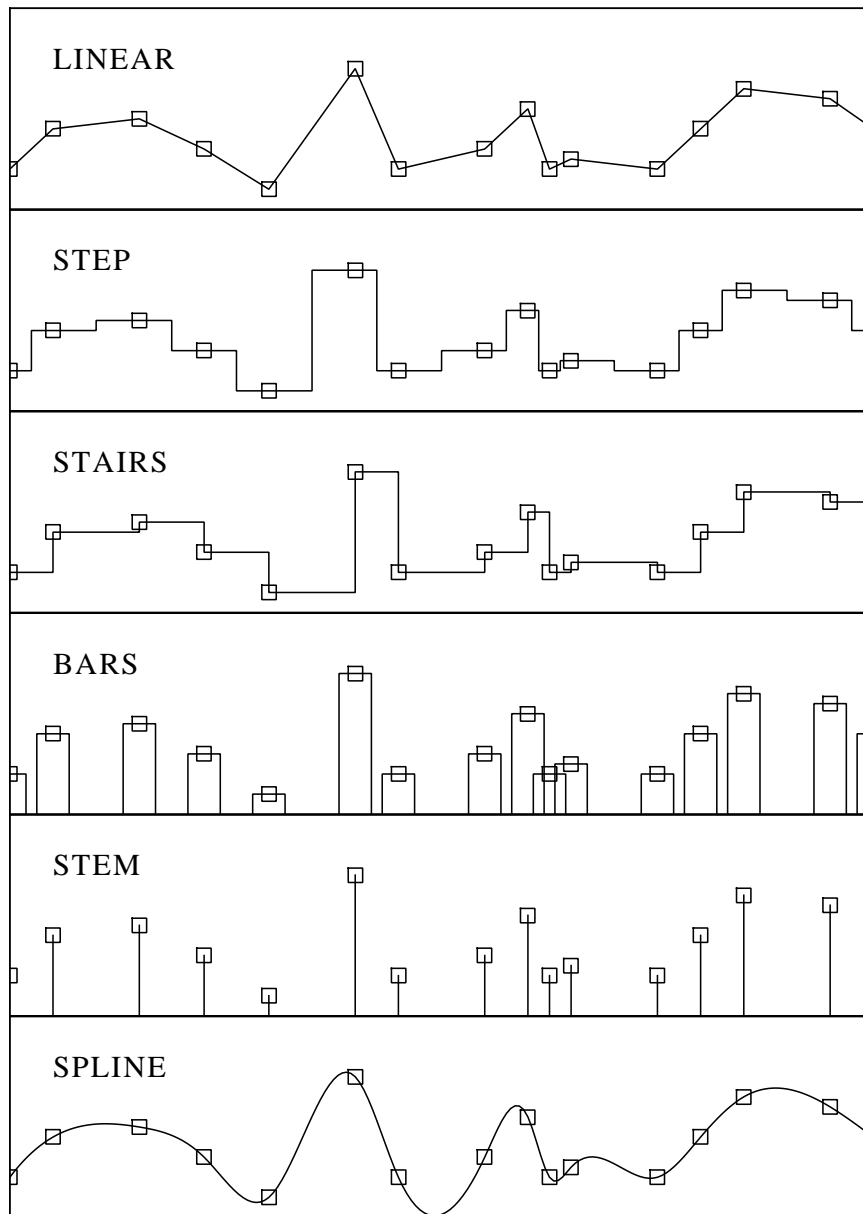


Figure B.4: Interpolation Methods

B.5 Line Styles

```
import de.dislin.Dislin;
public class styles {
    public static void main (String args []) {
        int i, nx, ny;

        String ctit1 = "Demonstration of CURVE";
        String ctit2 = "Line Styles";

        String ctyp [] = {"SOLID", "DOT", "DASH", "CHNDSH",
                          "CHNDOT", "DASHM", "DOTL", "DASHL"};

        float x [] = {3.f, 9.f};
        float y [] = {0.f, 0.f};

        Dislin.metafl ("cons");
        Dislin.setpag ("da4p");

        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();
        Dislin.center ();

        Dislin.chncrv ("both");
        Dislin.name ("X-axis", "x");
        Dislin.name ("Y-axis", "y");

        Dislin.titlin (ctit1, 1);
        Dislin.titlin (ctit2, 3);

        Dislin.graf (0.f, 10.f, 0.f, 2.f,
                   0.f, 10.f, 0.f, 2.f);
        Dislin.title ();

        for (i = 0; i < 8; i++) {
            y[0] = 8.5f - i;
            y[1] = 8.5f - i;
            nx = Dislin.nxposn (1.0f);
            ny = Dislin.nyposn (y[0]);
            Dislin.messag (ctyp[i], nx, ny - 20);
            Dislin.curve (x, y, 2);
        }

        Dislin.disfin ();
    }
}
```

Demonstration of CURVE

Line styles

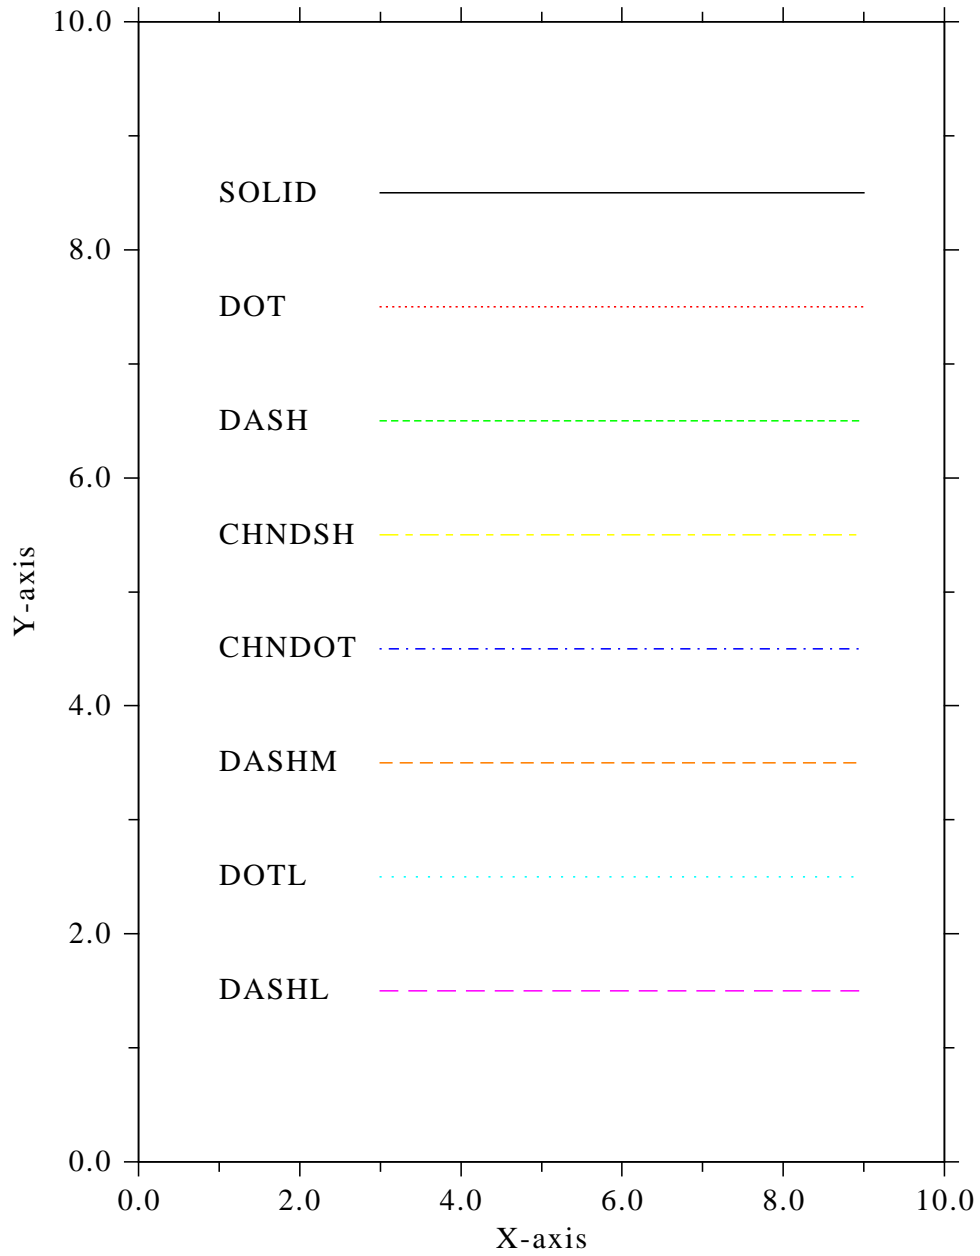


Figure B.5: Line Styles

B.6 Legends

```
import de.dislin.Dislin;
public class legend {
    public static void main (String args []) {
        int n = 100, i, nx, ny;
        double fpi = 3.1415926/180., step = 360. / (n-1);
        float xray [] = new float [n];
        float y1ray [] = new float [n];
        float y2ray [] = new float [n];
        String cbuf = "";

        for (i = 0; i < n; i++) {
            xray[i] = (float) (i * step);
            y1ray[i] = (float) Math.sin (xray[i] * fpi);
            y2ray[i] = (float) Math.cos (xray[i] * fpi);
        }

        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.axspos (450, 1800);
        Dislin.axslen (2200, 1200);
        Dislin.name ("X-axis", "x");
        Dislin.name ("Y-axis", "y");
        Dislin.labdig (-1, "x");
        Dislin.ticks (10, "xy");
        Dislin.titlin ("Demonstration of CURVE", 1);
        Dislin.titlin ("Legend", 3);
        Dislin.graf (0.f, 360.f, 0.f, 90.f,
                    -1.f, 1.f, -1.f, 0.5f);

        Dislin.title ();
        Dislin.xaxgit ();

        Dislin.chncrv ("both");
        Dislin.curve (xray, y1ray, n);
        Dislin.curve (xray, y2ray, n);

        Dislin.legini (cbuf, 2, 7);
        nx = Dislin.nxposn (190.f);
        ny = Dislin.nyposn (0.75f);
        Dislin.legpos (nx, ny);
        Dislin.leglin (cbuf, "sin (x)", 1);
        Dislin.leglin (cbuf, "cos (x)", 2);
        Dislin.legt tit ("Legend");
        Dislin.legend (cbuf, 3);
        Dislin.disfin ();
    }
}
```

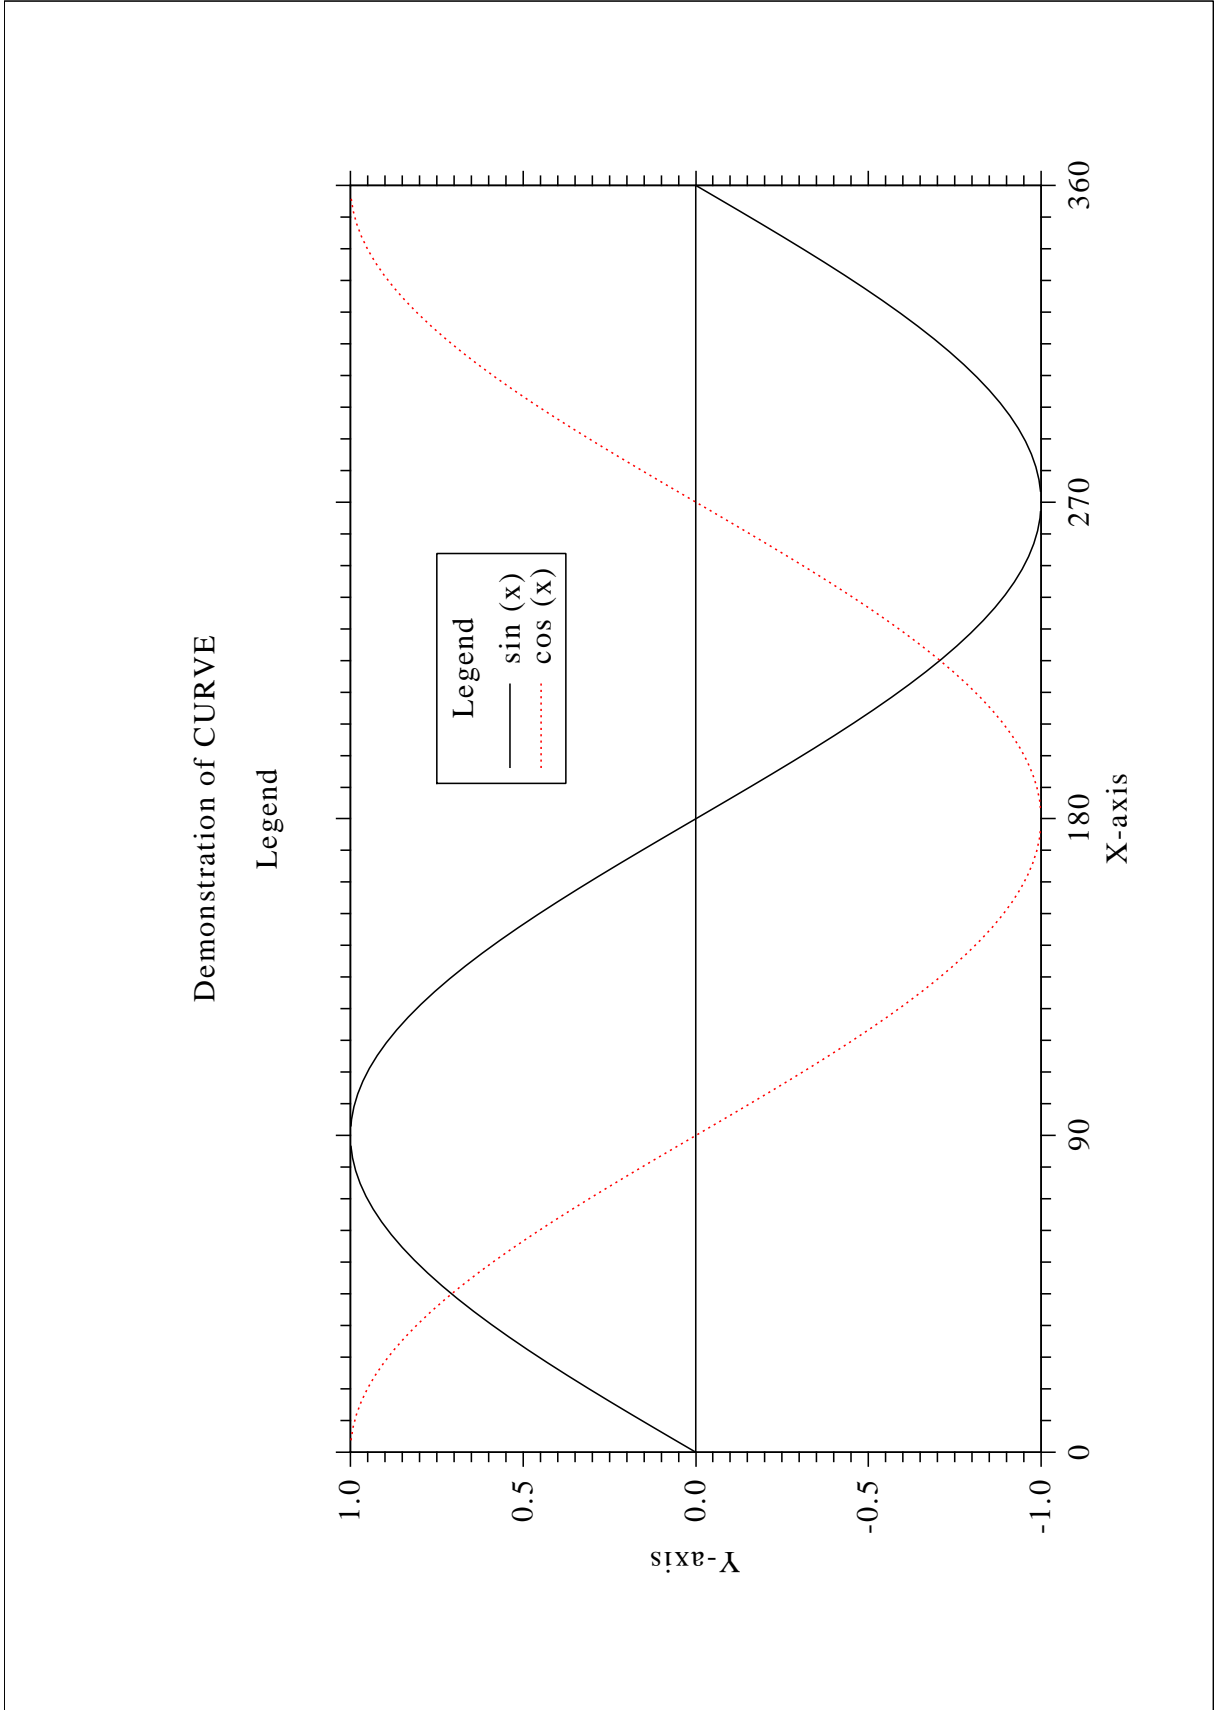


Figure B.6: Legends

B.7 Shading Patterns (AREAF)

```
import de.dislin.Dislin;
public class areaf {
    public static void main (String args []) {
        int i, j, k, ii, nl, nx, ny, nx0 = 335, ny0 = 350,
            iclr = 0;
        int ix [] = {0, 300, 300, 0};
        int iy [] = {0, 0, 400, 400};
        int ixp [] = {0, 0, 0, 0};
        int iyp [] = {0, 0, 0, 0};
        String ctit = "Shading Patterns (AREAF)";

        Dislin.metafl ("cons");
        Dislin.disini ();
        Dislin.setvlt ("small");
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.height (50);
        nl = Dislin.nlmess (ctit);
        Dislin.messag (ctit, (2970 - nl)/2, 200);

        for (i = 0; i < 3; i++) {
            ny = ny0 + i * 600;
            for (j = 0; j < 6; j++) {
                nx = nx0 + j * 400;
                ii = i * 6 + j;
                Dislin.shdpat (ii);
                iclr++;
                iclr = iclr % 8;
                if (iclr == 0) iclr = 8;
                Dislin.setclr (iclr);
                for (k = 0; k < 4; k++) {
                    ixp[k] = ix[k] + nx;
                    iyp[k] = iy[k] + ny;
                }

                Dislin.areaf (ixp, iyp, 4);
                nl = Dislin.nlnumb (ii, -1);
                nx = nx + (300 - nl) / 2;
                Dislin.color ("foreground");
                Dislin.number (ii, -1, nx, ny + 460);
            }
        }
        Dislin.disfin ();
    }
}
```

Shading patterns (AREAF)

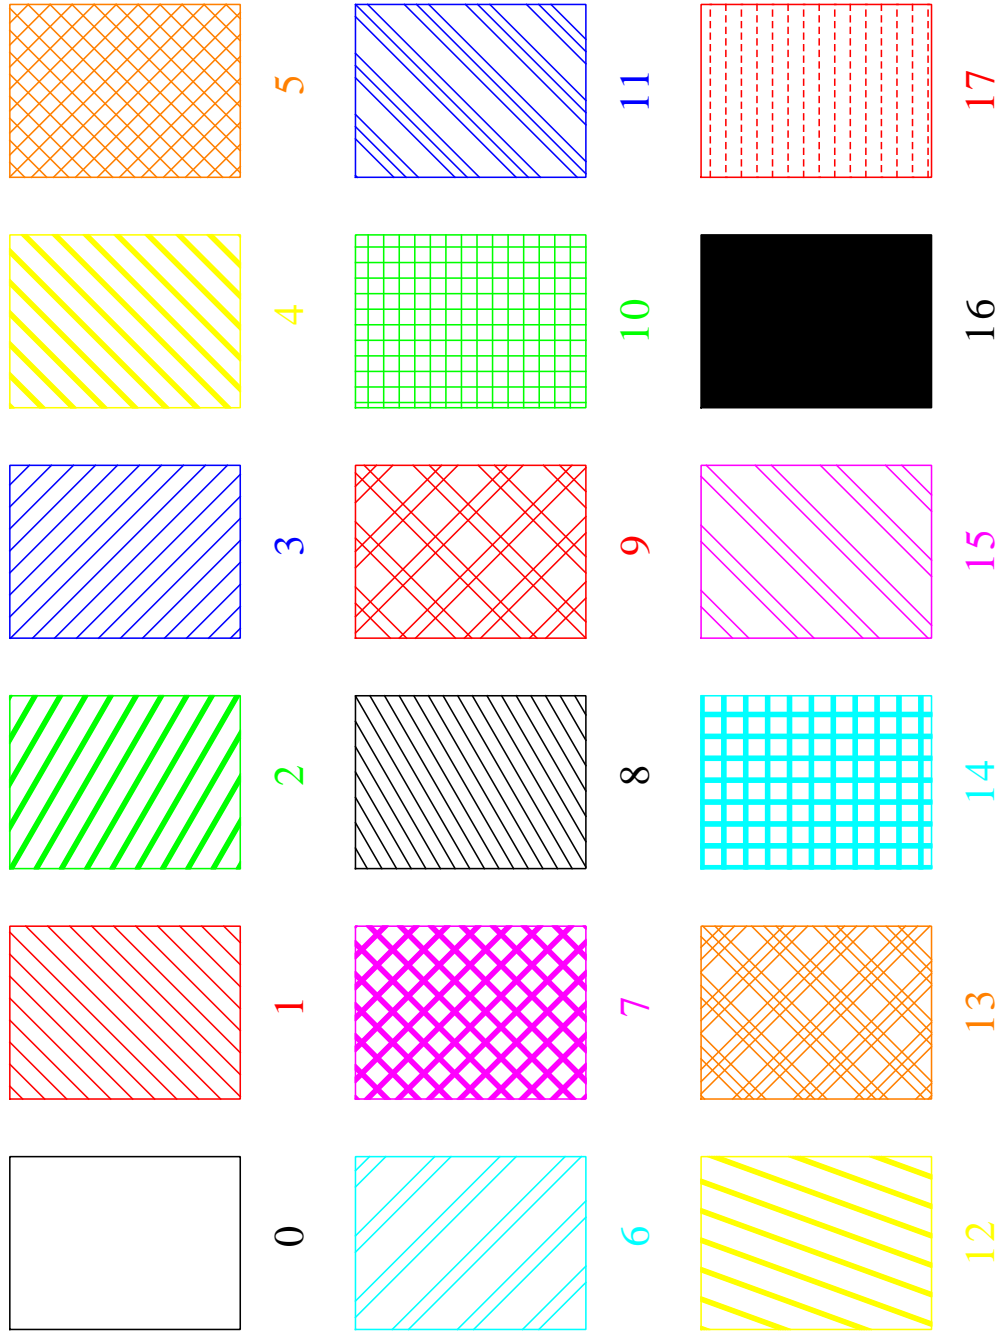


Figure B.7: Shading Patterns

B.8 Vectors

```
import de.dislin.Dislin;
public class vectors {
    public static void main (String args []) {

        int ivec [] = {0, 1111, 1311, 1421, 1531, 1701, 1911,
            3111, 3311, 3421, 3531, 3703, 4221, 4302,
            4413, 4522, 4701, 5312, 5502, 5703};
        int nl, nx = 300, ny = 400, i;
        String ctit = "Vectors";

        Dislin.metafl ("cons");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.height (60);
        nl = Dislin.nlmess (ctit);
        Dislin.messag (ctit, (2970 - nl)/2, 200);

        Dislin.height (50);
        for (i = 0; i < 20; i++) {
            if (i == 10) {
                nx += 2970 / 2;
                ny = 400;
            }

            nl = Dislin.nlnumb (ivec[i], -1);
            Dislin.number (ivec[i], -1, nx -nl, ny - 25);
            Dislin.vector (nx + 100, ny, nx + 1000, ny, ivec[i]);
            ny += 160;
        }

        Dislin.disfin ();
    }
}
```

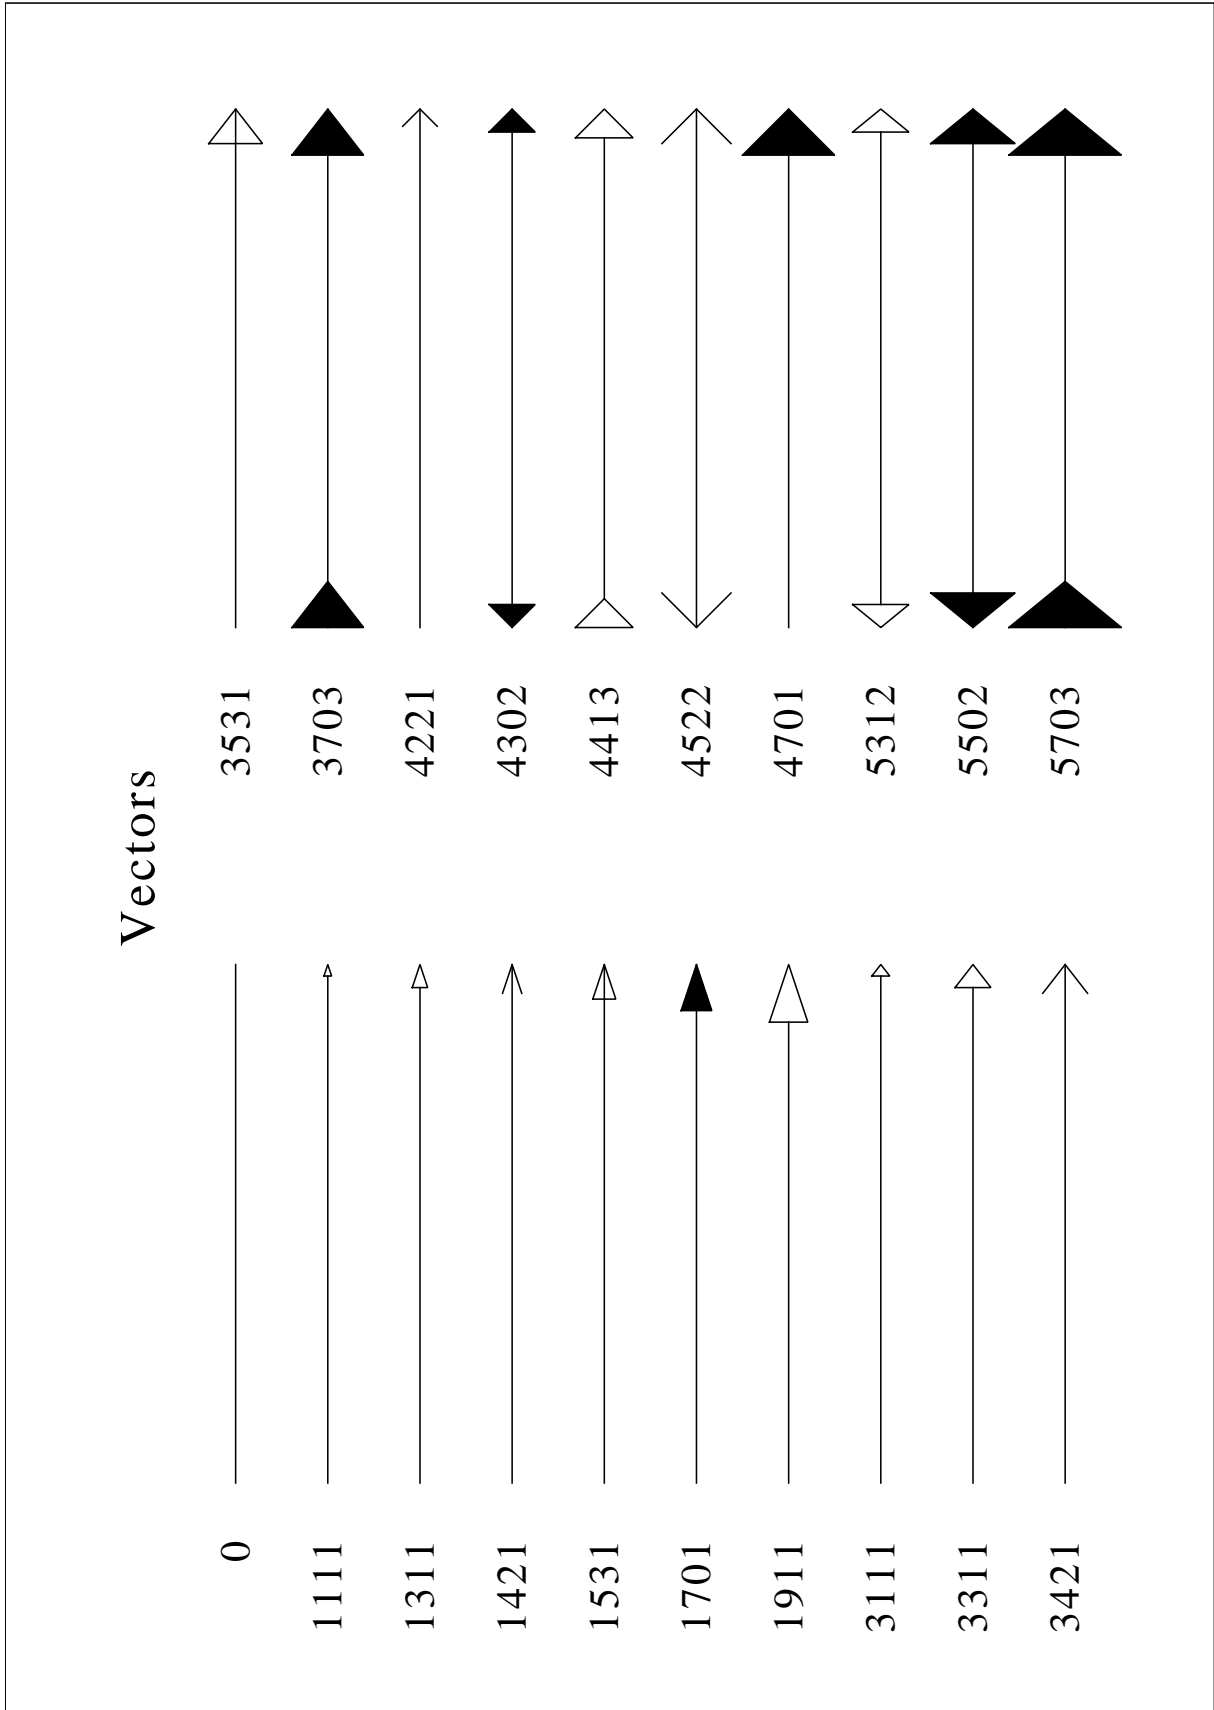



Figure B.8: Vectors

B.9 3-D Colour Plot

```
import de.dislin.Dislin;
public class color3d {
    public static void main (String args []) {
        int n = 50, m = 50, i, j;
        float zmat [] = new float [n*m];

        String ctit1 = "3-D Colour Plot of the Function";
        String ctit2 = "F(X,Y) = 2*SIN(X)*SIN(Y)";

        double x, y;
        double fpi = 3.1415926/180.;
        double stepx = 360. / (n-1);
        double stepy = 360. / (m-1);
        for (i = 0; i < n; i++) {
            x = i * stepx;
            for (j = 0; j < m; j++) {
                y = j * stepy;
                zmat[i*m+j] = (float) (2 * Math.sin(x*fpi) *
                    Math.sin(y*fpi));
            }
        }

        Dislin.metafl ("cons");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.hwfont ();

        Dislin.titlin (ctit1, 1);
        Dislin.titlin (ctit2, 3);

        Dislin.name ("X-axis", "x");
        Dislin.name ("Y-axis", "y");
        Dislin.name ("Z-axis", "z");

        Dislin.intax ();
        Dislin.autres (n, m);
        Dislin.axspos (300, 1850);
        Dislin.ax3len (2200, 1400, 1400);

        Dislin.graf3 (0.f, 360.f, 0.f, 90.f,
            0.f, 360.f, 0.f, 90.f,
            -2.f, 2.f, -2.f, 1.f);
        Dislin.crvmat (zmat, n, m, 1, 1);
        Dislin.height (50);
        Dislin.title ();
        Dislin.disfin ();
    }
}
```

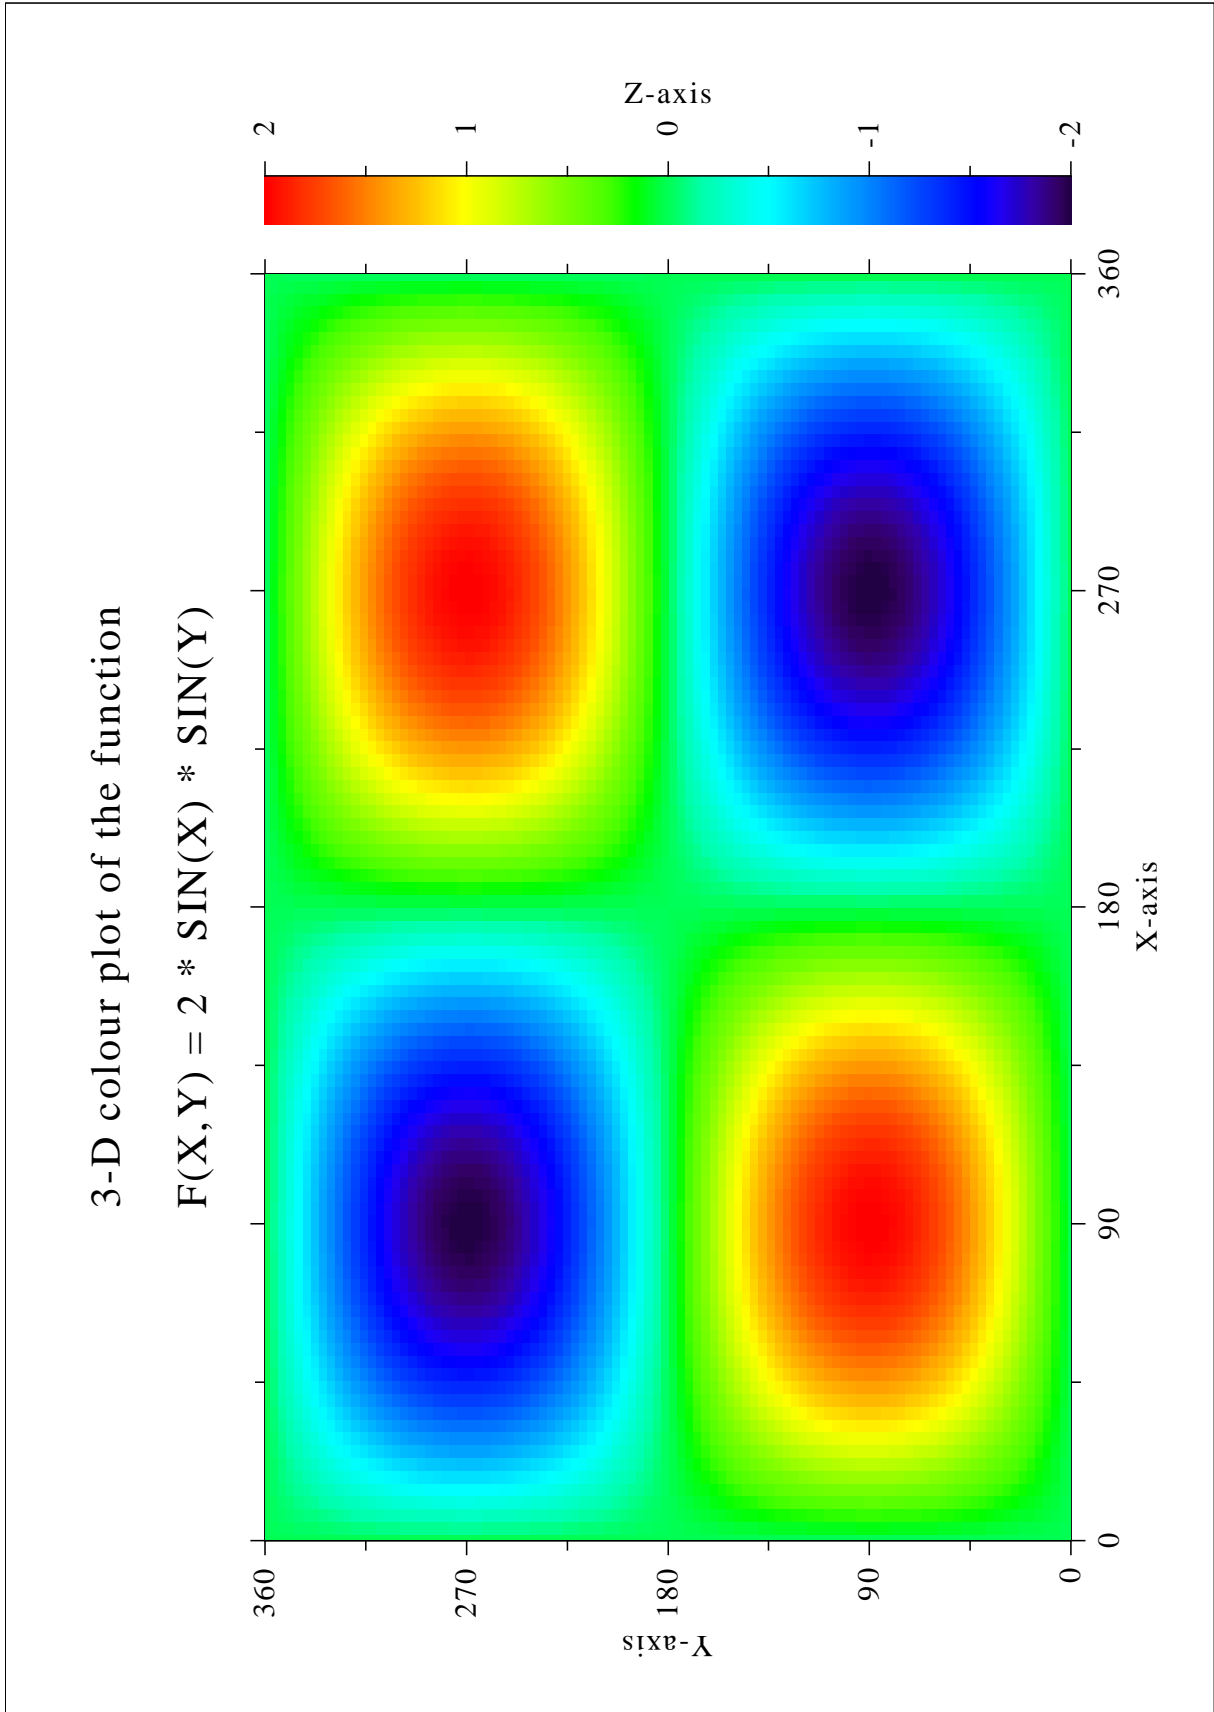


Figure B.9: 3-D Colour Plot

B.10 Surface Plot

```
import de.dislin.Dislin;
public class surface {
    public static void main (String args []) {
        int n = 50, m = 50, i, j;
        float zmat [] = new float [n*m];

        double x, y;
        double fpi = 3.1415926/180.;
        double stepx = 360. / (n-1);
        double stepy = 360. / (m-1);
        for (i = 0; i < n; i++) {
            x = i * stepx;
            for (j = 0; j < m; j++) {
                y = j * stepy;
                zmat[i*m+j] = (float) (2 * Math.sin(x*fpi) *
                    Math.sin(y*fpi));
            }
        }

        Dislin.metafl ("cons");
        Dislin.setpag ("da4p");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.axspos (200, 2600);
        Dislin.axslen (1800, 1800);

        Dislin.name ("X-axis", "x");
        Dislin.name ("Y-axis", "y");
        Dislin.name ("Z-axis", "z");

        Dislin.titlin ("Surface Plot (SURMAT)", 1);
        Dislin.titlin ("F(X,Y) = 2*SIN(X)*SIN(Y)", 3);

        Dislin.view3d (-5.f, -5.f, 4.f, "abs");
        Dislin.graf3d (0.f, 360.f, 0.f, 90.f,
            0.f, 360.f, 0.f, 90.f,
            -3.f, 3.f, -3.f, 1.f);
        Dislin.height (50);
        Dislin.title ();

        Dislin.color ("green");
        Dislin.surmat (zmat, n, m, 1, 1);
        Dislin.disfin ();
    }
}
```

Surface plot (SURMAT)

$$F(X,Y) = 2*\text{SIN}(X)*\text{SIN}(Y)$$

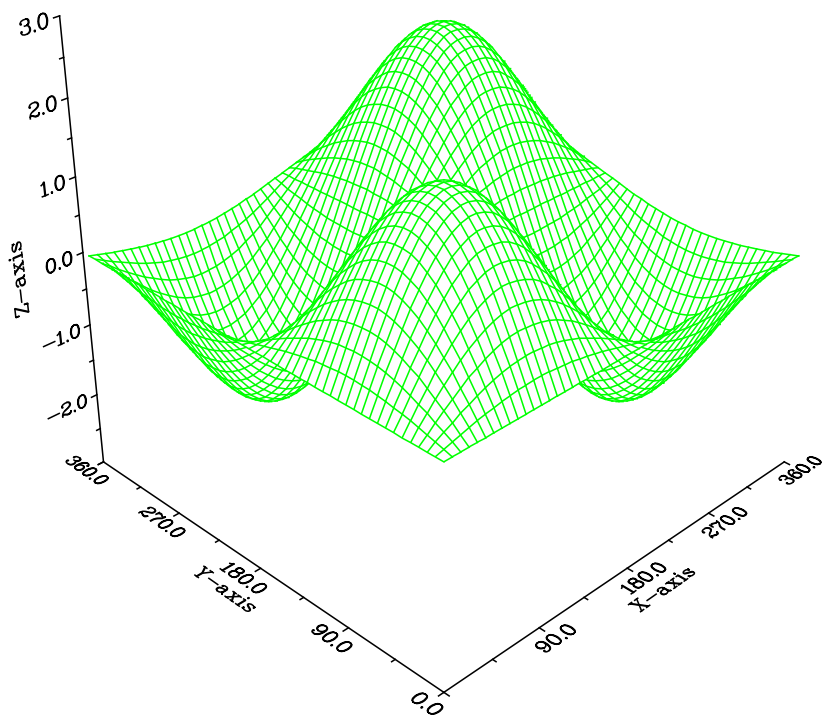


Figure B.10: Surface Plot

B.11 Surface Plot

```
import de.dislin.Dislin;

public class surfcp {
    public static float zfun (float x, float y, int iopt) {
        double v;

        if (iopt == 1) {
            v = Math.cos ((double) x) * (3. + Math.cos ((double) y));
        }
        else if (iopt == 2) {
            v = Math.sin ((double) x) * (3. + Math.cos ((double) y));
        }
        else {
            v = Math.sin ((double) y);
        }
        return (float) v;
    }

    public static void main (String args []) {
        float p = 3.14159f, step;
        Dislin.metafl ("cons");
        Dislin.setpag ("da4p");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.axspos (200,2400);
        Dislin.axslen (1800,1800);
        Dislin.intax ();

        Dislin.titlin ("Surface Plot of the Parametric Function",2);
        Dislin.titlin ("[COS(t)+(3+COS(u)), SIN(t)*(3+COS(u)), SIN(u)]",4);
        Dislin.name ("X-axis", "x");
        Dislin.name ("Y-axis", "y");
        Dislin.name ("Z-axis", "z");

        Dislin.vkytit (-300);
        Dislin.zscale (-1.f,1.f);
        Dislin.graf3d (-4.f,4.f,-4.f,1.f,-4.f,4.f,-4.f,1.f,-3.f,3.f,-3.f,1.f);
        Dislin.height (40);
        Dislin.title ();

        Dislin.surmsh ("on");
        step = 2.f * 3.14159f/30.f;
        Dislin.surfcp ("surfcp.zfun", 0.f, 2*p, step, 0.f, 2*p, step);
        Dislin.disfin ();
    }
}
```

Surface Plot of the Parametric Function
[$\cos(t)(3+\cos(u))$, $\sin(t)(3+\cos(u))$, $\sin(u)$]

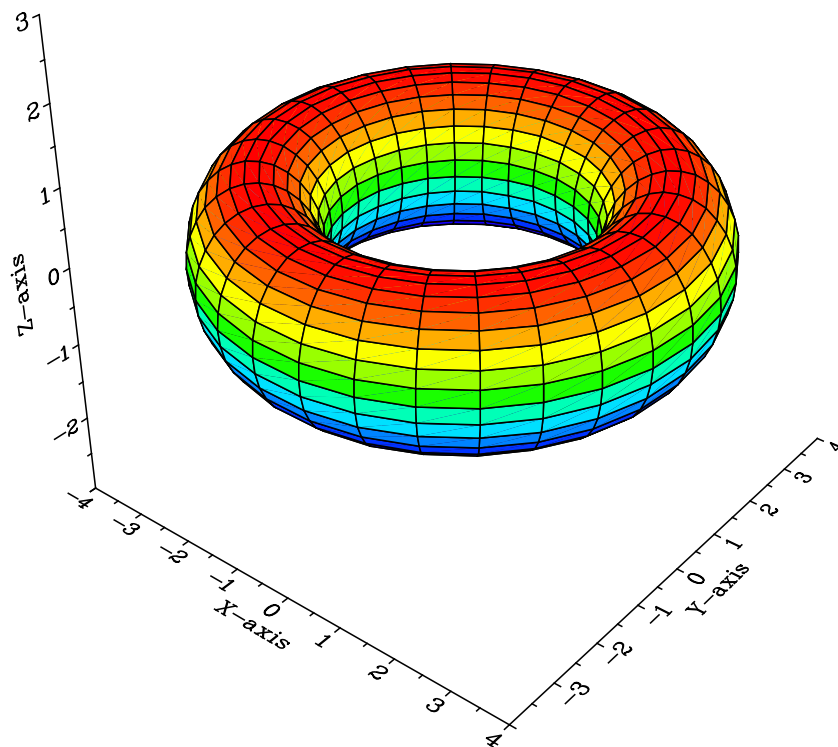


Figure B.11: Surface Plot of a Parametric Function

B.12 Polar Plots

```
import de.dislin.Dislin;
public class polar {
    public static void main (String args []) {
        int n = 300, m = 10, i, ic;
        double a, f = 3.1415926/180., step = 360. / (n-1);

        float x1 [] = new float [n];
        float y1 [] = new float [n];
        float x2 [] = new float [m];
        float y2 [] = new float [m];
        for (i = 0; i < n; i++) {
            a = (i * step) * f;
            y1[i] = (float) a;
            x1[i] = (float) Math.sin (5 * a);
        }
        for (i = 0; i < m; i++) {
            x2[i] = i + 1;
            y2[i] = i + 1;
        }

        Dislin.setpag ("da4p");
        Dislin.metafl ("cons");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.hwfont ();
        Dislin.titlin ("Polar Plots", 2);
        Dislin.ticks (3, "Y");
        Dislin.axends ("NOENDS", "X");
        Dislin.labdig (-1, "Y");
        Dislin.axslen (1000, 1000);
        Dislin.axsorg (1050, 900);

        ic = Dislin.intrgb (0.95f,0.95f,0.95f);
        Dislin.axsbgd(ic);
        Dislin.grafp (1.f, 0.f, 0.2f, 0.f, 30.f);
        Dislin.curve (x1, y1, n);
        Dislin.htitle (50);
        Dislin.title ();
        Dislin.endgrf ();

        Dislin.labdig (-1, "X");
        Dislin.axsorg (1050, 2250);
        Dislin.labtyp ("VERT", "Y");
        Dislin.grafp (10.f, 0.f, 2.f, 0.f, 30.f);
        Dislin.barwth (-5.f);
        Dislin.polcrv ("FBARS");
        Dislin.curve (x2, y2, m);
        Dislin.disfin ();
    }
}
```


Polar Plots

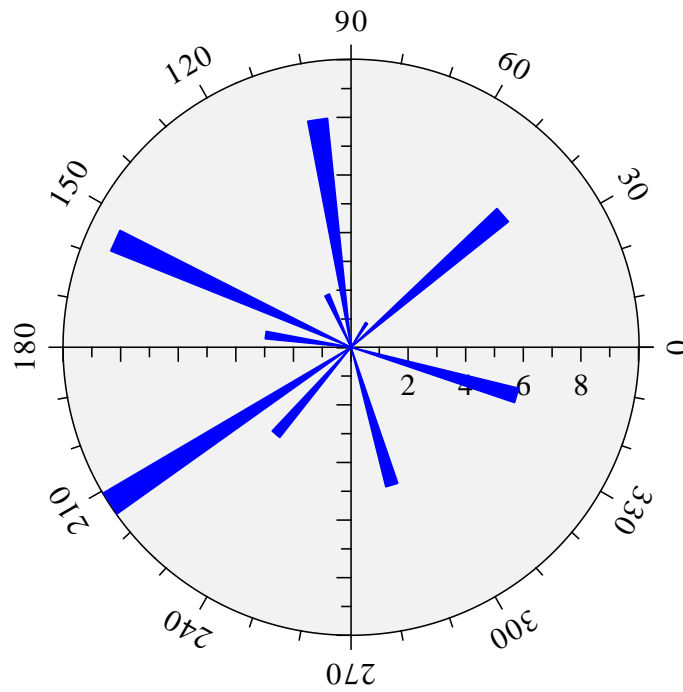
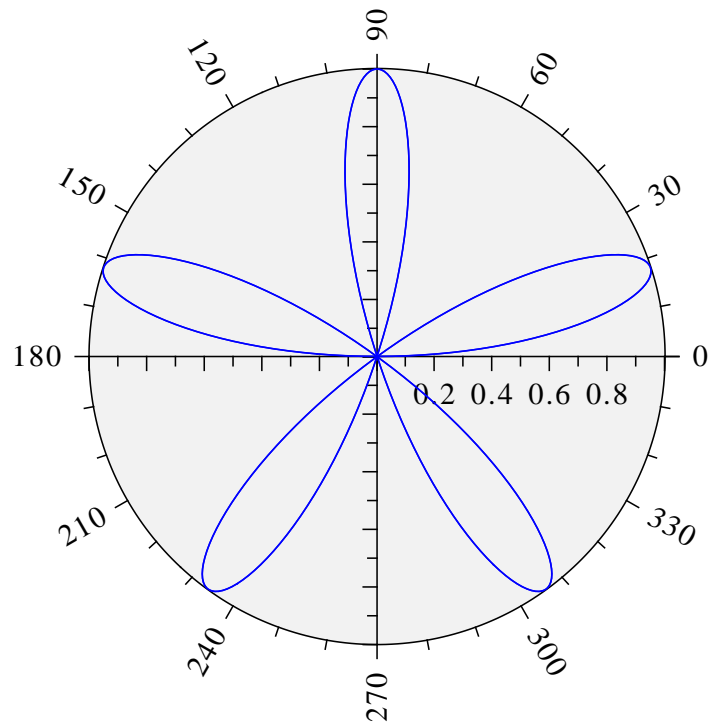


Figure B.12: Polar Plots

B.13 Contour Plot

```
import de.dislin.Dislin;
public class contour {
    public static void main (String args []) {
        int n = 50, m = 50, i, j;
        float zlev;
        float zmat [] = new float [n*m];
        float xray [] = new float [n];
        float yray [] = new float [m];

        String ctit1 = "Contour Plot";
        String ctit2 = "F(X,Y) = 2*SIN(X)*SIN(Y)";

        double x, y;
        double fpi = 3.1415926/180.;
        double stepx = 360. / (n-1);
        double stepy = 360. / (m-1);

        for (i = 0; i < n; i++) {
            xray[i] = (float) (i * stepx);
        }

        for (j = 0; j < m; j++) {
            yray[j] = (float) (j * stepy);
        }

        for (i = 0; i < n; i++) {
            x = xray[i] * fpi;
            for (j = 0; j < m; j++) {
                y = yray[j] * fpi;
                zmat[i*m+j] = (float) (2 * Math.sin(x) * Math.sin(y));
            }
        }

        Dislin.metafl ("cons");
        Dislin.setpag ("da4p");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.titlin (ctit1, 1);
        Dislin.titlin (ctit2, 3);
        Dislin.intax ();
        Dislin.axspos (450, 2650);

        Dislin.name ("X-axis", "x");
        Dislin.name ("Y-axis", "y");

        Dislin.graf (0.f, 360.f, 0.f, 90.f,
                   0.f, 360.f, 0.f, 90.f);
        Dislin.height (50);
    }
}
```

```
Dislin.title ();

Dislin.height (30);
for (i = 0; i < 9; i++) {
    zlev = -2.f + i * 0.5f;
    if (i == 4) {
        Dislin.labels ("none", "contur");
    }
    else {
        Dislin.labels ("float", "contur");
    }
    Dislin.setclr ((i+1) * 28);
    Dislin.contur (xray, n, yray, m, zmat, zlev);
}
Dislin.disfin ();
}
}
```

Contour Plot

$$F(X,Y) = 2 * \text{SIN}(X) * \text{SIN}(Y)$$

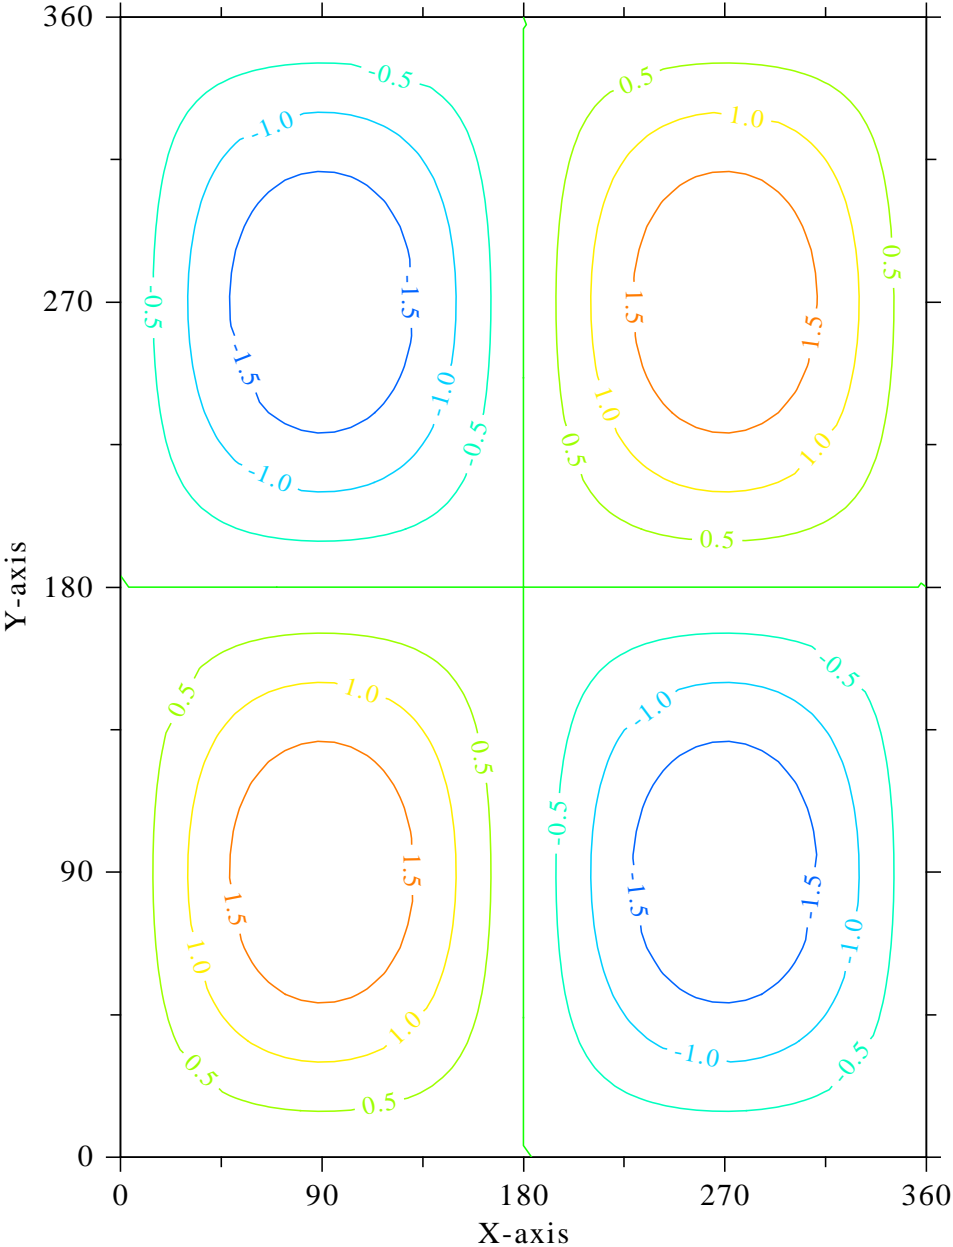


Figure B.13: Contour Plot

B.14 Shaded Contour Plot

```
import de.dislin.Dislin;
public class conshd {
    public static void main (String args []) {
        int n = 50, m = 50, i, j;
        float zmat [] = new float [n*m];
        float xray [] = new float [n];
        float yray [] = new float [m];
        float zlev [] = new float [12];

        String ctit1 = "Shaded Contour Plot";
        String ctit2 = "F(X,Y) = (X[2$ - 1][2$ + (Y[2$ - 1][2$";

        double x, y;
        double stepx = 1.6 / (n-1);
        double stepy = 1.6 / (m-1);

        for (i = 0; i < n; i++) {
            xray[i] = (float) (i * stepx);
        }

        for (j = 0; j < m; j++) {
            yray[j] = (float) (j * stepy);
        }

        for (i = 0; i < n; i++) {
            x = xray[i] * xray[i] - 1.;
            x *= x;
            for (j = 0; j < m; j++) {
                y = yray[j] * yray[j] - 1;
                zmat[i*m+j] = (float) (x + y * y);
            }
        }

        Dislin.metafl ("cons");
        Dislin.setpag ("da4p");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();
        Dislin.mixalf ();

        Dislin.titlin (ctit1, 1);
        Dislin.titlin (ctit2, 3);
        Dislin.name ("X-axis", "x");
        Dislin.name ("Y-axis", "y");
        Dislin.axspos (450, 2670);
        Dislin.shdmod ("poly", "contur");

        Dislin.graf (0.f, 1.6f, 0.f, 0.2f,
                    0.f, 1.6f, 0.f, 0.2f);
        for (i = 0; i < 12; i++) {
```

```
    zlev[11-i] = 0.1f + i * 0.1f;
}

Dislin.conshd (xray, n, yray, m, zmat, zlev, 12);

Dislin.height (50);
Dislin.title ();
Dislin.disfin ();
}
}
```

Shaded Contour Plot

$$F(X,Y) = (X^2 - 1)^2 + (Y^2 - 1)^2$$

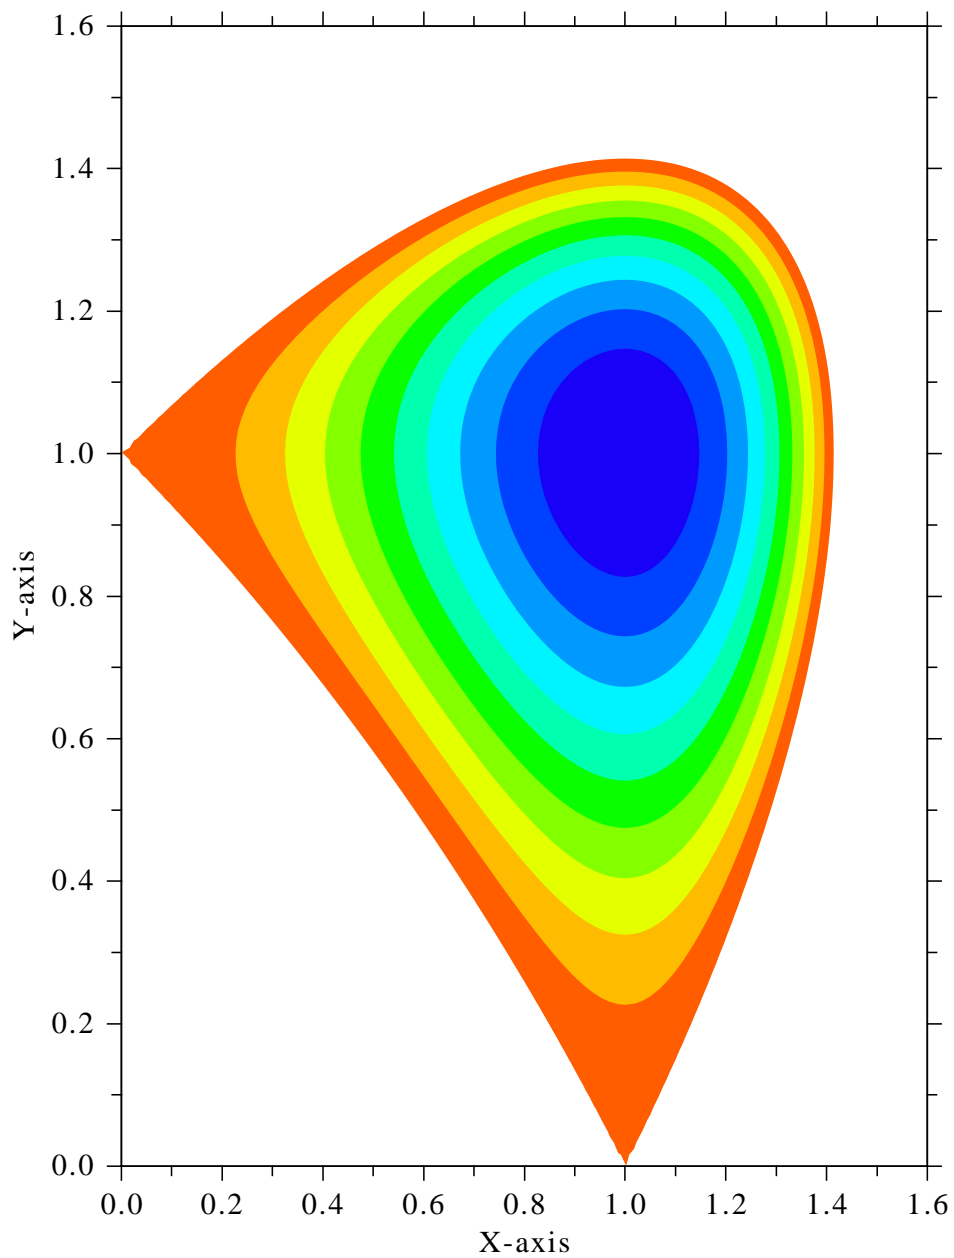


Figure B.14: Shaded Contour Plot

B.15 Pie Charts

```
import de.dislin.Dislin;
public class piegrf {
    public static void main (String args []) {
        float xray [] = {1.f, 2.5f, 2.f, 2.7f, 1.8f};
        String ctit = "Pie Charts (PIEGRF)";
        String cbuf = " ";

        Dislin.metafl ("cons");
        Dislin.setpag ("da4p");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.chnpie ("both");

        Dislin.axslen (1600, 1000);
        Dislin.titlin (ctit, 2);

        Dislin.legini (cbuf, 5, 8);
        Dislin.leglin (cbuf, "FIRST", 1);
        Dislin.leglin (cbuf, "SECOND", 2);
        Dislin.leglin (cbuf, "THIRD", 3);
        Dislin.leglin (cbuf, "FOURTH", 4);
        Dislin.leglin (cbuf, "FIFTH", 5);

        // Selecting shading patterns
        Dislin.patcyc (1, 7);
        Dislin.patcyc (2, 4);
        Dislin.patcyc (3, 13);
        Dislin.patcyc (4, 3);
        Dislin.patcyc (5, 5);

        Dislin.axspos (250, 2800);
        Dislin.piegrf (cbuf, 1, xray, 5);
        Dislin.endgrf ();

        Dislin.axspos (250, 1600);
        Dislin.labels ("DATA", "PIE");
        Dislin.labpos ("EXTERNAL", "PIE");
        Dislin.piegrf (cbuf, 1, xray, 5);

        Dislin.height (50);
        Dislin.title ();

        Dislin.disfin ();
    }
}
```


Pie Charts (PIEGRF)

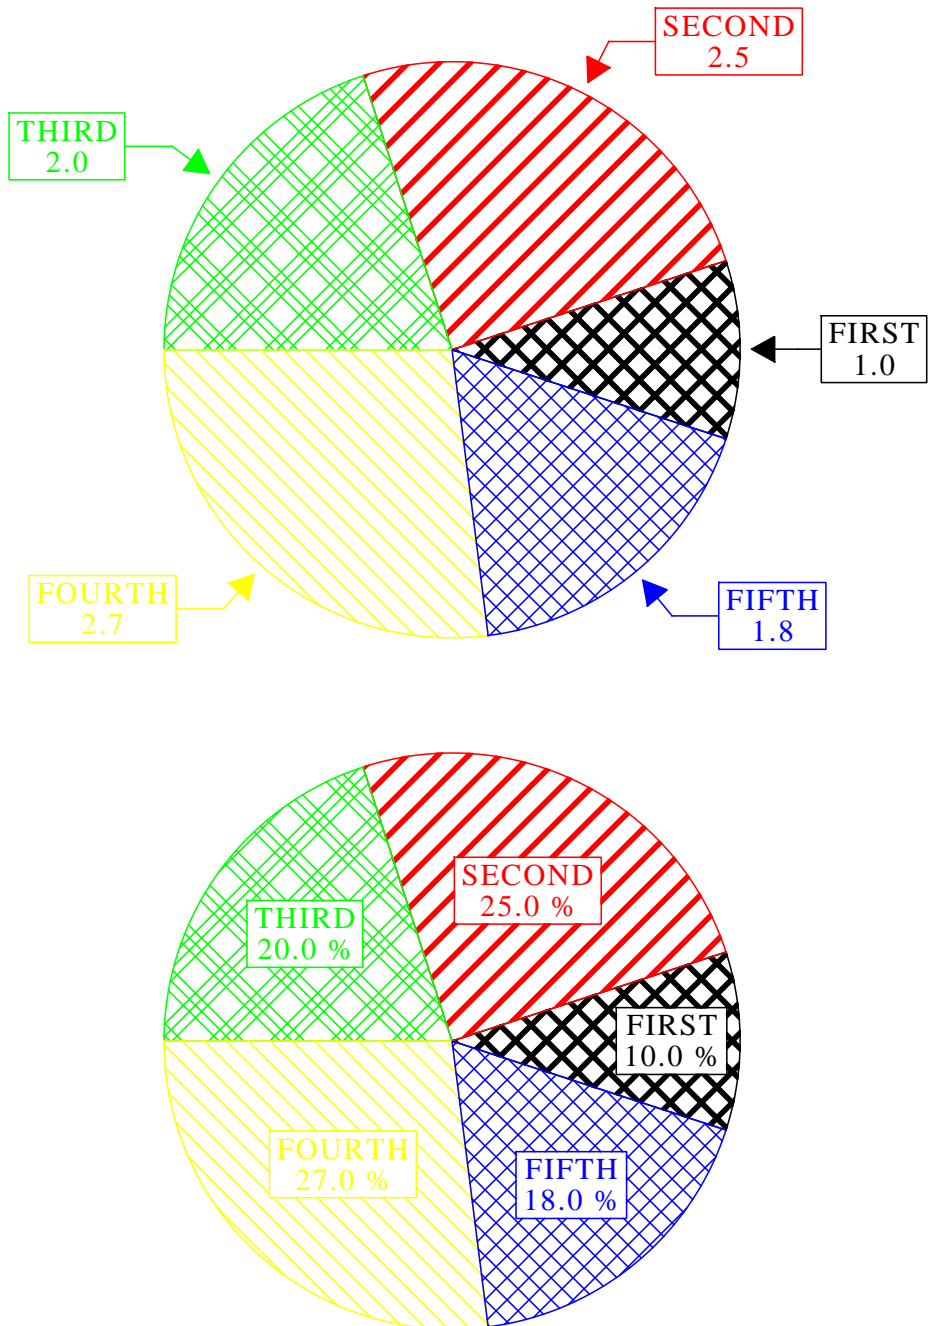


Figure B.15: Pie Charts

B.16 World Coastlines and Lakes

```
import de.dislin.Dislin;
public class world {
    public static void main (String args []) {
        Dislin.metafl ("cons");
        Dislin.disini ();
        Dislin.pagera ();
        Dislin.complx ();

        Dislin.frame (3);
        Dislin.axspos (400, 1850);
        Dislin.axslen (2400, 1400);

        Dislin.name ("Longitude", "x");
        Dislin.name ("Latitude", "y");
        Dislin.titlin ("World Coastlines and Lakes",3);

        Dislin.labels ("map","xy");
        Dislin.grafmp (-180.f, 180.f, -180.f, 90.f,
            -90.f, 90.f, -90.f, 30.f);

        Dislin.gridmp (1, 1);
        Dislin.color ("green");
        Dislin.world ();

        Dislin.color ("fore");
        Dislin.height (50);
        Dislin.title ();
        Dislin.disfin ();
    }
}
```

World coastlines and lakes

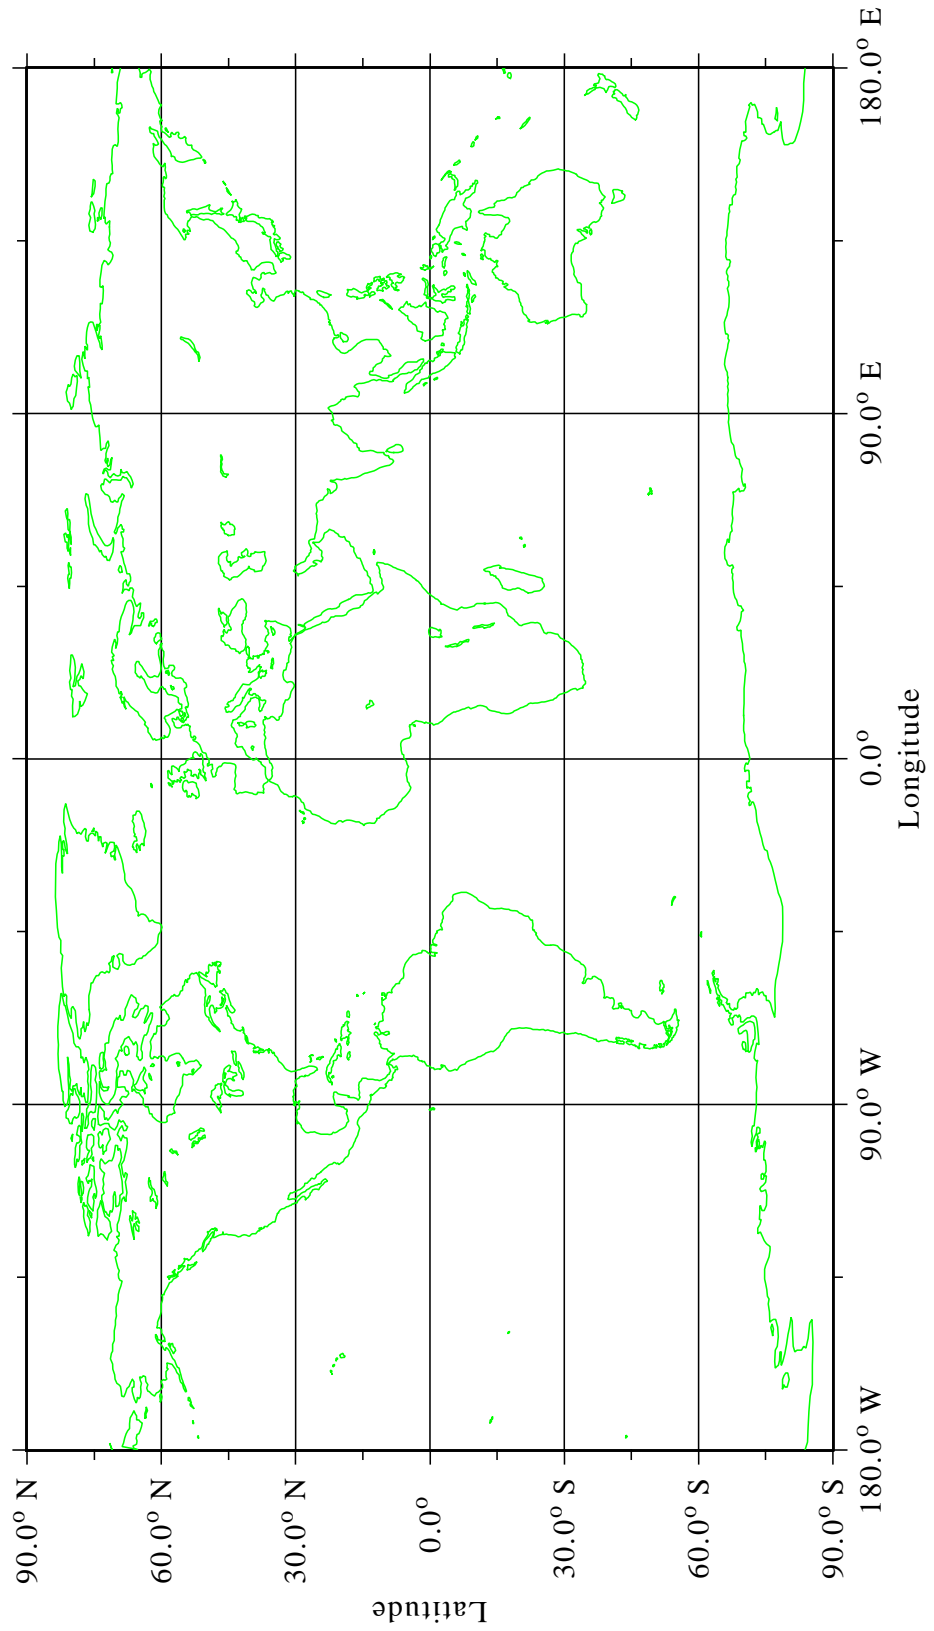


Figure B.16: World Coastlines and Lakes

